


MCX Male Cable Connector, RC06MCMB-B3A

DC-6GHz, Straight, Attachment for RG-316D Cable

Dimensions(mm) Tolerance $\pm 1\%$

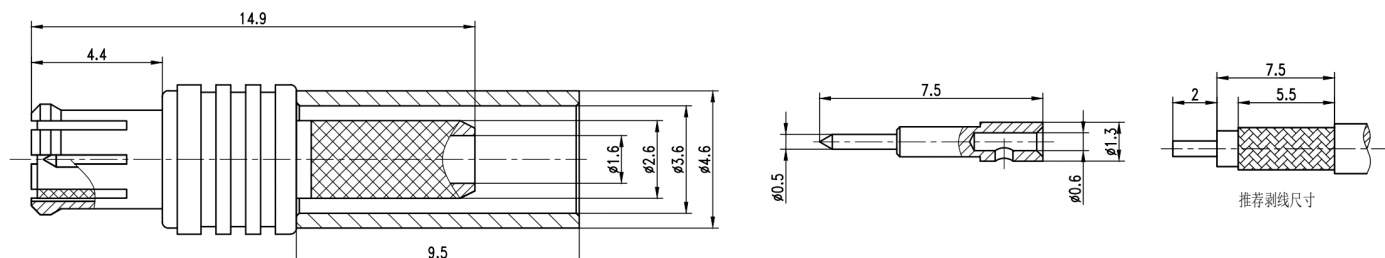

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	-	Withstand Voltage	500 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC06MCMB-B3A, H-Grade	Connector	MCX Male
Shape/Mounting	Straight	Attachment Method	Solder
Attachment for	RG-316D Series Cable		
Connector Body	Gold plated beryllium copper/Gold plated brass	Insulator	PTFE
Center Contact	Gold plated brass		
Dimension	14.9(L)mm	Net Weight	-