




SMA Female Field Replaceable Connector, RC18SF-UFD051
DC-18GHz, Straight, 4 hole flange, 8.64mm×5.64mm Hole Spacing,
0.51mm Pin

Dimensions(mm) Tolerance±1%

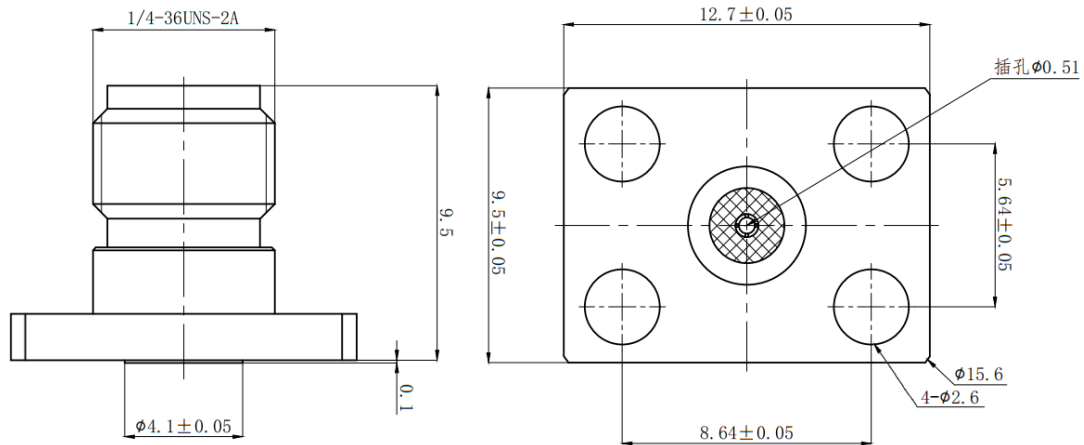

Electrical & Environmental

Frequency Range	DC-18GHz
Impedance	50 ohm
VSWR	1.25 max
Contact Resistance	≤ In:3.0/Out:2.0 mΩ
Withstand Voltage	750 V
Mating Cycles	> 500 Cycles
Temperature Range	-55°C~+155°C

Mechanical & Product Information

Product Number	RC18SF-UFD051, E-Grade
Product Type	SMA Female, Field Replaceable Connector
Shape/Mounting	Straight, 4 hole flange
Attachment Method	Field Replaceable
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PTFE
Dimension	9.5(L)mm
Net Weight	About 2.1g



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350