




SMA Female Bulkhead Thread-in Connector, RC18SFB-PF2D127

DC-18GHz, Straight, 2 hole flange, 12.2mm Hole Spacing, 1.27mm Pin

Dimensions(mm) Tolerance $\pm 1\%$

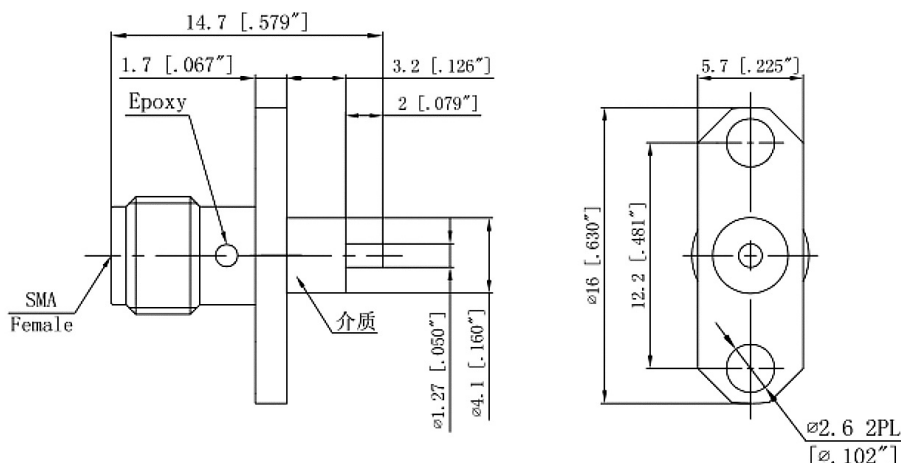

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.3 Max	Withstand Voltage	1000 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C~+165°C

Mechanical & Product Information

Product Number	RC18SFB-PF2D127	Connector	SMA Female
Shape/Mounting	Straight , 2 hole flange	Attachment Method	Solder
Connector Body	Gold plated brass	Insulator	PTFE
Center Contact	Gold plated beryllium copper		
Dimension	14.7(L)mm	Net Weight	About 1.8g