


SMA母头4孔法兰空气线穿墙连接器, RC27SF-AF4D13-XX DC-26.5GHz, 安装孔距8mm×5mm

结构尺寸图（单位：mm）误差±1%

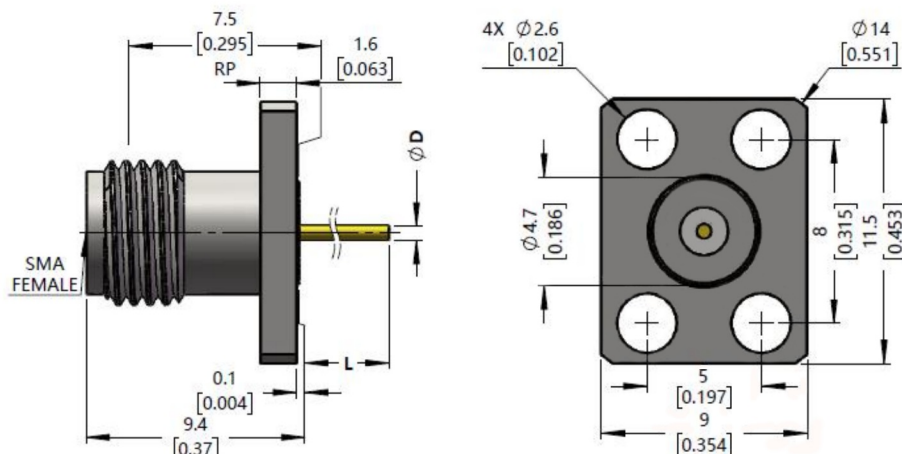

产品规格选型表

D(mm)	L(mm)	RFTOP P/N
0.30	2.00	RC27SF-AF4D13-0301
0.50	6.00	RC27SF-AF4D13-0501
0.60	26.00	RC27SF-AF4D13-0601
0.64	2.50	RC27SF-AF4D13-06401
0.64	6.00	RC27SF-AF4D13-06402
0.64	20.80	RC27SF-AF4D13-06403
0.64	18.00	RC27SF-AF4D13-06404
0.80	21.30	RC27SF-AF4D13-0801
0.80	24.90	RC27SF-AF4D13-0802
0.80	60.00	RC27SF-AF4D13-0803

电气与环境性能

频率范围	DC-26.5GHz	特性阻抗	50 ohm
电压驻波比	1.2 max	介质耐压	1000 V
绝缘电阻	≥ 5000 MΩ	接触电阻	≤ In:3.0/Out:2.0 mΩ
耐久性	> 500 次	工作温度	-55℃~+165℃

产品和材料信息

产品型号	RC27SF-AF4D13-XX	接头类型	SMA 母头
外形结构	Straight , 4 hole flange	安装方式	Solder
连接器主体	Passivated stainless steel	绝缘支撑	PTFE&PEI
内导体	Gold plated beryllium copper		




微信扫描
关注我们

RFTOP®频优微波
高品质微波毫米波器件供应商

www.rftop.cn
service@rftop.com 0755-88840350


微信扫描
在线咨询





SMA母头4孔法兰空气线穿墙连接器, RC27SF-AF4D13-XX DC-26.5GHz, 安装孔距8mm×5mm

典型测试数据

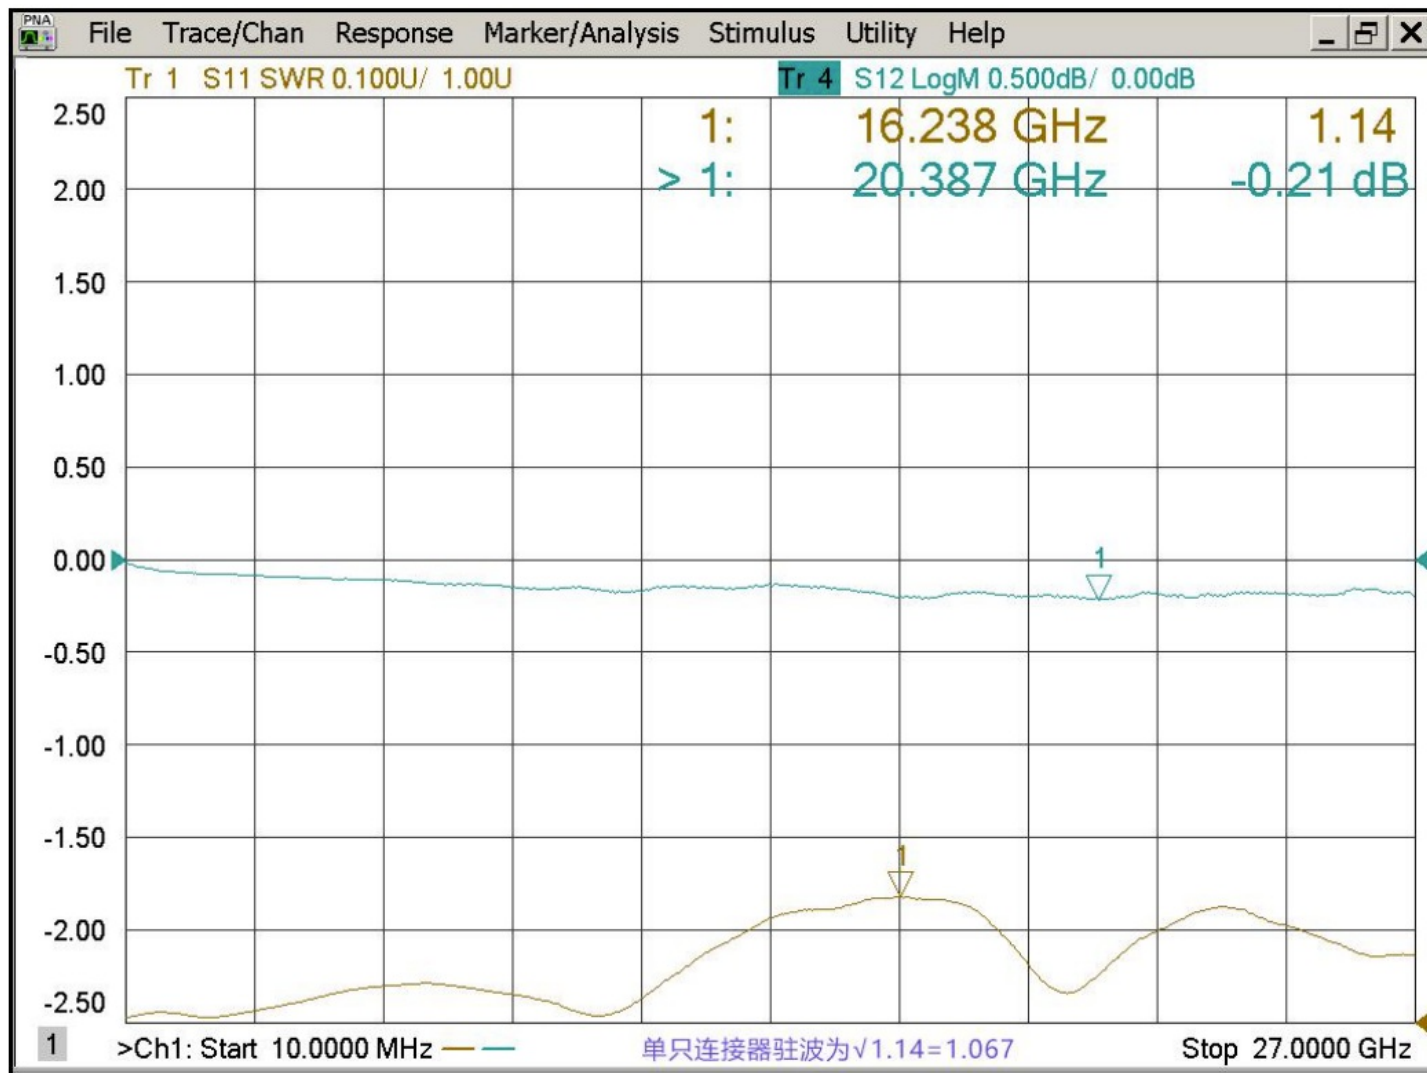

微信扫描
关注我们

RFTOP®频优微波
高品质微波毫米波器件供应商

www.rftop.cn
service@rftop.com 0755-88840350

微信扫描
在线咨询

