




SMA Female Cable Connector, RC27SF-B4F2D

DC-26.5GHz, Straight, 4 hole flange, Attachment for 086 Cable

Dimensions(mm) Tolerance $\pm 1\%$

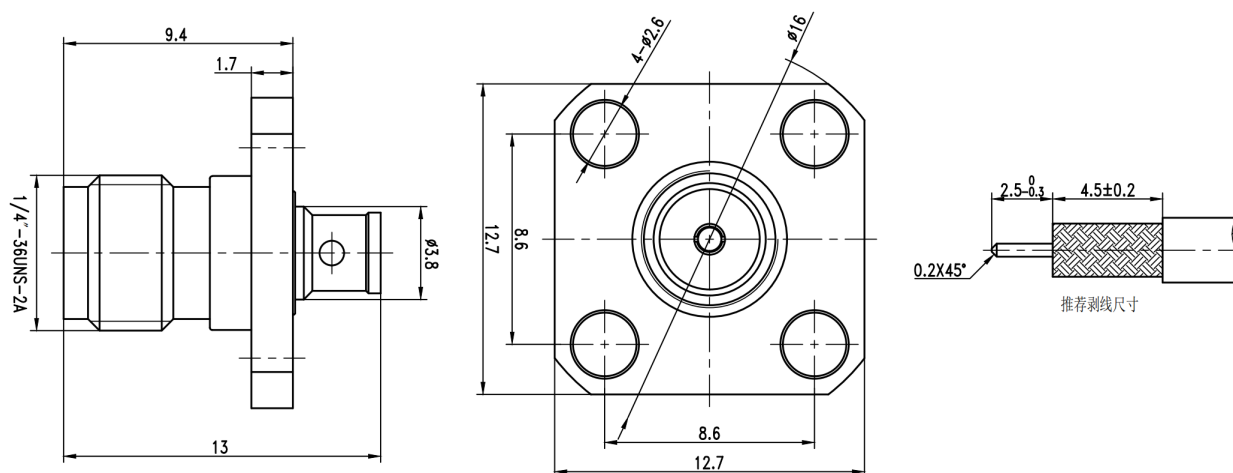

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.3 Max	Withstand Voltage	750 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC27SF-B4F2D, P-Grade	Connector	SMA Female
Shape/Mounting	Straight , 4 hole flange	Attachment Method	Solder
Attachment for	086 Series Cable		
Connector Body	Passivated stainless steel/Gold plated brass	Insulator	PTFE
Center Contact	Gold plated beryllium copper		
Dimension	13(L)mm	Net Weight	-