




SMA Female PCB Connector, RC27SF-EL06-XX

DC-26.5GHz, Straight, 2 hole flange, 9.5mm Hole Spacing

Dimensions(mm) Tolerance $\pm 1\%$

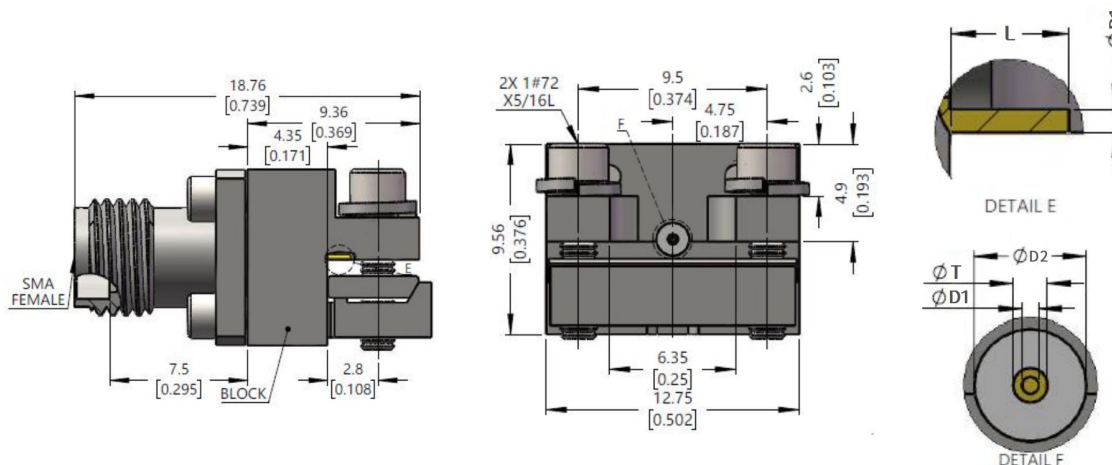

Product Selection

D1(mm)	T(mm)	L(mm)	D2(mm)	RFTOP P/N
0.13	0.23	0.75	0.75	RC27SF-EL06-1323
0.23	0.23	0.75	0.75	RC27SF-EL06-2323
0.18	0.30	0.75	1.00	RC27SF-EL06-1830
0.25	0.51	1.27	1.66	RC27SF-EL06-2551

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.2 max	Withstand Voltage	1000 V
Insulation Resistance	$\geq 5000 \text{ M}\Omega$	Contact Resistance	$\leq \text{In:3.0/Out:2.0 m}\Omega$
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC27SF-EL06-XX	Connector	SMA Female
Shape/Mounting	Straight , 2 hole flange	Attachment Method	Clamp
Connector Body	Passivated stainless steel	Insulator	PTFE&PEI
Center Contact	Gold plated beryllium copper		
Dimension	18.76(L)*12.75(W)*9.56(H)mm	Net Weight	-