


SMA Female Bulkhead Flange Connector, RC27SF-MF4D01-XX

DC-26.5GHz, Straight, 4 hole flange, 8.6mm Hole Spacing

Dimensions(mm) Tolerance $\pm 1\%$

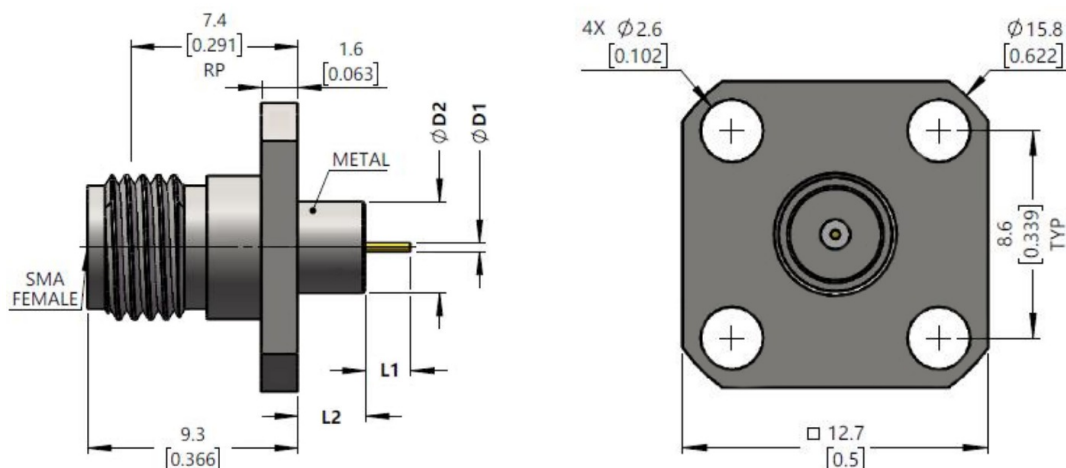

Product Selection

D1(mm)	L1(mm)	D2(mm)	L2(mm)	RFTOP P/N
0.38	2.00	4.00	3.00	RC27SF-MF4D01-03801
0.38	1.00	4.00	3.00	RC27SF-MF4D01-03802
0.38	2.00	4.00	1.40	RC27SF-MF4D01-03803
0.38	0.40	4.00	3.00	RC27SF-MF4D01-03804
0.38	0.60	4.00	3.00	RC27SF-MF4D01-03805
0.38	1.27	4.00	3.00	RC27SF-MF4D01-03806
0.38	3.00	4.00	3.00	RC27SF-MF4D01-03807
0.38	2.00	4.00	4.00	RC27SF-MF4D01-03808
0.38	2.00	4.10	4.00	RC27SF-MF4D01-03809
0.80	2.00	4.00	4.00	RC27SF-MF4D01-0801

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.2 max	Withstand Voltage	1000 V
Insulation Resistance	$\geq 5000 \text{ M}\Omega$	Contact Resistance	$\leq \text{In:}3.0/\text{Out:}2.0 \text{ m}\Omega$
Mating Cycles	> 500 Cycles	Temperature Range	-55°C~+165°C

Mechanical & Product Information

Product Number	RC27SF-MF4D01-XX	Connector	SMA Female
Shape/Mounting	Straight , 4 hole flange	Attachment Method	Solder
Connector Body	Passivated stainless steel	Insulator	PTFE&PEI
Center Contact	Gold plated beryllium copper		