




SMA母头2孔法兰直连穿墙连接器, RC27SF-TF2D07-XX

DC-26.5GHz, 安装孔距8.6mm

结构尺寸图（单位：mm）误差±1%

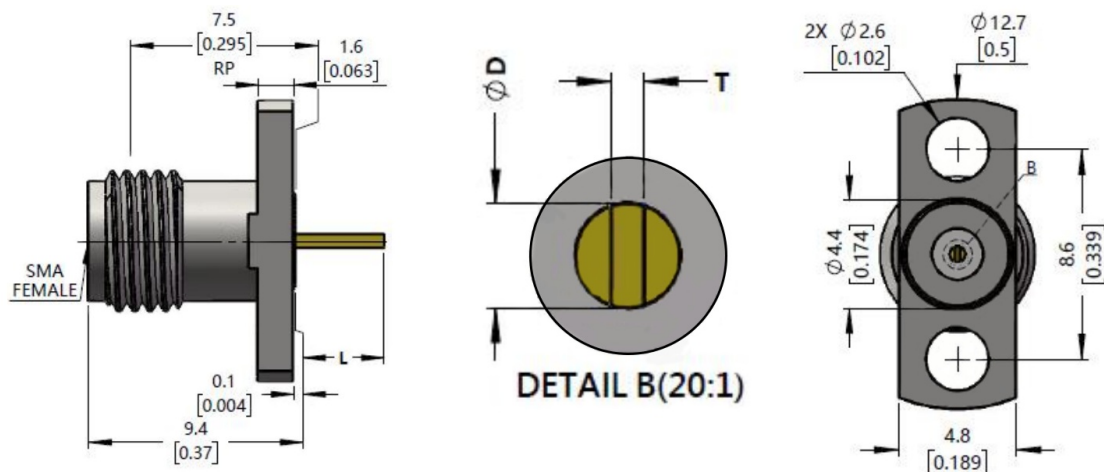

产品规格选型表

D(mm)	T(mm)	L(mm)	RFTOP P/N
0.64	0.20	1.00	RC27SF-TF2D07-06401
0.64	0.20	2.00	RC27SF-TF2D07-06402
0.64	0.20	4.00	RC27SF-TF2D07-06404
0.64	0.20	6.00	RC27SF-TF2D07-06406

电气与环境性能

频率范围	DC-26.5GHz	特性阻抗	50 ohm
电压驻波比	1.2 max	介质耐压	1000 V
绝缘电阻	$\geq 5000 \text{ M}\Omega$	接触电阻	$\leq \text{In:3.0/Out:2.0 m}\Omega$
耐久性	> 500 次	工作温度	-55°C~+165°C

产品和材料信息

产品型号	RC27SF-TF2D07-XX	接头类型	SMA 母头
外形结构	Straight , 2 hole flange	安装方式	Solder
连接器主体	Passivated stainless steel	绝缘支撑	PTFE&PEI
内导体	Gold plated beryllium copper		



微信扫描
关注我们

RFTOP®频优微波
高品质微波毫米波器件供应商

www.rftop.cn
service@rftop.com 0755-88840350


微信扫描
在线咨询





SMA母头2孔法兰直连穿墙连接器, RC27SF-TF2D07-XX
DC-26.5GHz, 安装孔距8.6mm

典型测试数据

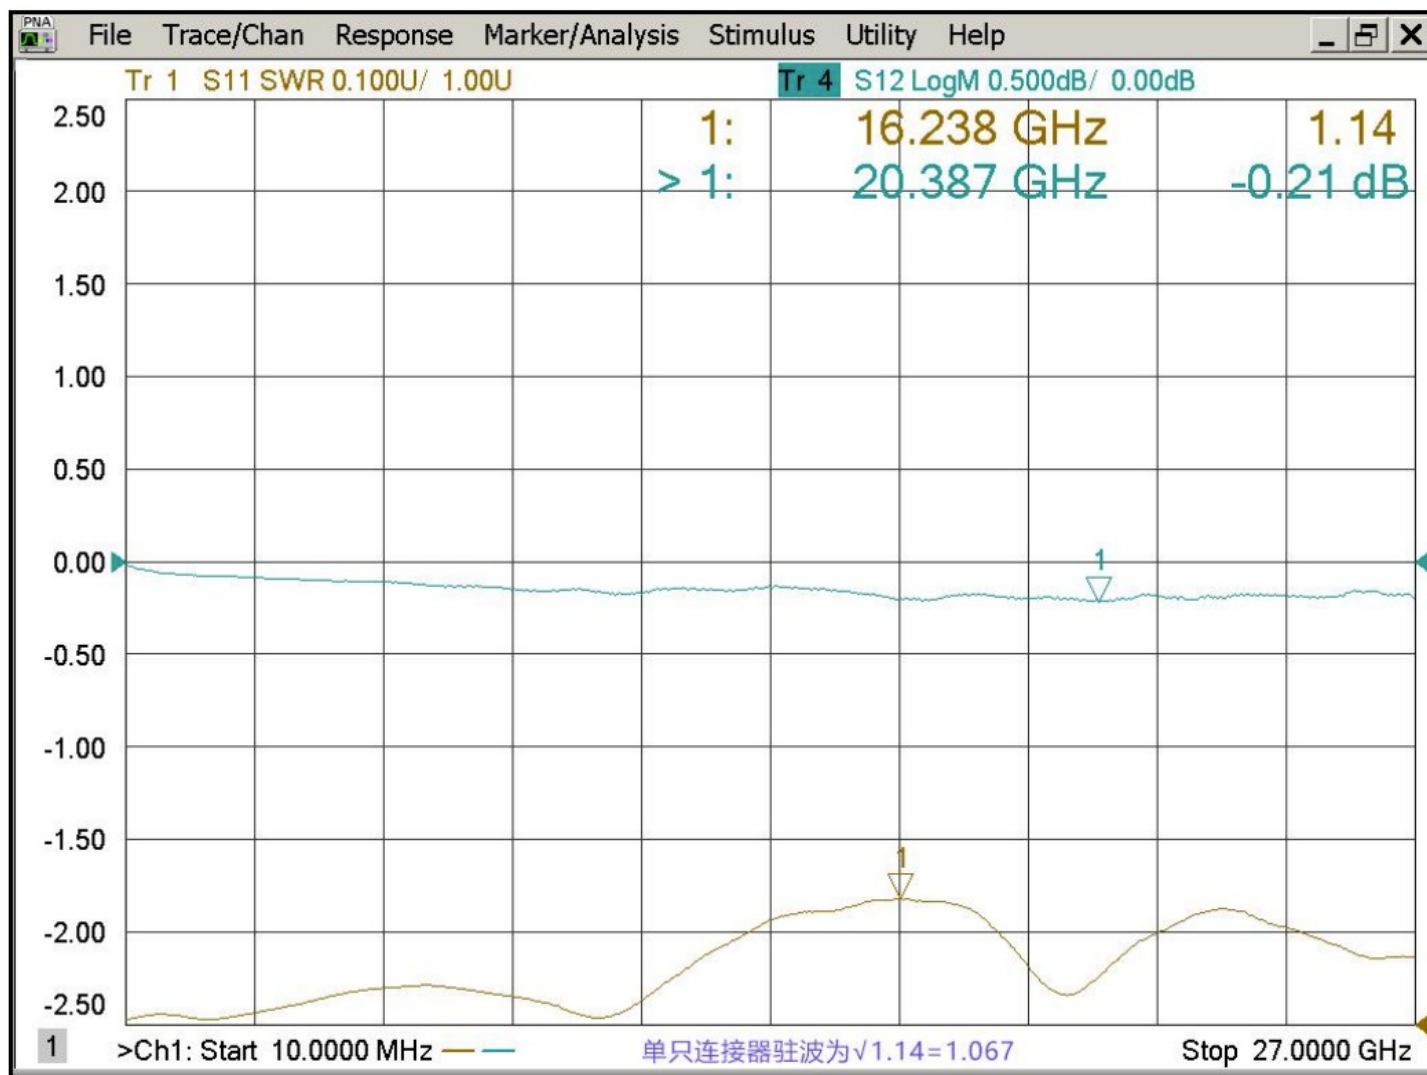

微信扫描
关注我们

RFTOP®频优微波
高品质微波毫米波器件供应商

www.rftop.cn
service@rftop.com 0755-88840350

微信扫描
在线咨询

