




## SMA公2孔法兰PCB End Launch免焊连接器, RC27SM-EL07-XX DC-26.5GHz, 安装孔距9.5mm

结构尺寸图 (单位: mm) 误差±1%

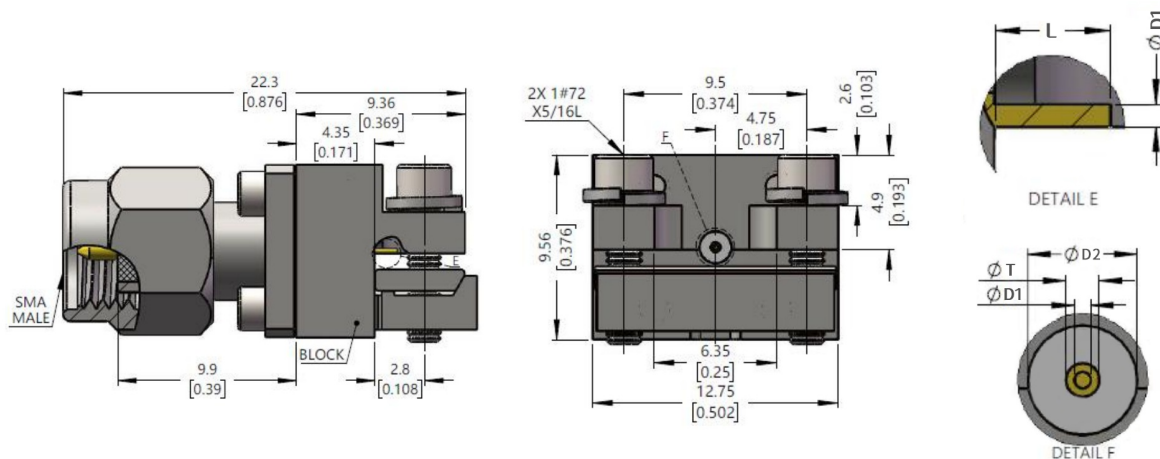

### 产品规格选型表

| D1(mm) | L(mm) | D2(mm) | T(mm) | RFTOP P/N        |
|--------|-------|--------|-------|------------------|
| 0.13   | 0.75  | 0.75   | 0.23  | RC27SM-EL07-1323 |
| 0.18   | 0.75  | 1.00   | 0.30  | RC27SM-EL07-1830 |
| 0.23   | 0.75  | 0.75   | 0.23  | RC27SM-EL07-2323 |
| 0.25   | 1.27  | 1.66   | 0.51  | RC27SM-EL07-2551 |

### 电气与环境性能

|       |                             |      |                     |
|-------|-----------------------------|------|---------------------|
| 频率范围  | DC-26.5GHz                  | 特性阻抗 | 50 ohm              |
| 电压驻波比 | 1.2 Max (PCB Test 1.45 Max) | 介质耐压 | 1000 V              |
| 绝缘电阻  | ≥ 5000 MΩ                   | 接触电阻 | ≤ In:3.0/Out:2.0 mΩ |
| 耐久性   | > 500 次                     | 工作温度 | -55°C ~ +165°C      |

### 产品和材料信息

|       |                              |      |          |
|-------|------------------------------|------|----------|
| 产品型号  | RC27SM-EL07-XX               | 接头类型 | SMA 公    |
| 外形结构  | Straight , 2 hole flange     | 安装方式 | Clamp    |
| 连接器主体 | Passivated stainless steel   | 绝缘支撑 | PTFE&PEI |
| 内导体   | Gold plated beryllium copper |      |          |
| 外形尺寸  | 22.3(L)*12.75(W)*9.56(H)mm   | 产品净重 | -        |



微信扫描  
关注我们

RFTOP®频优微波  
高品质微波毫米波器件供应商

www.rftop.cn  
service@rftop.com 0755-88840350



微信扫描  
在线咨询





## SMA公2孔法兰PCB End Launch免焊连接器, RC27SM-EL07-XX DC-26.5GHz, 安装孔距9.5mm

### 典型曲线

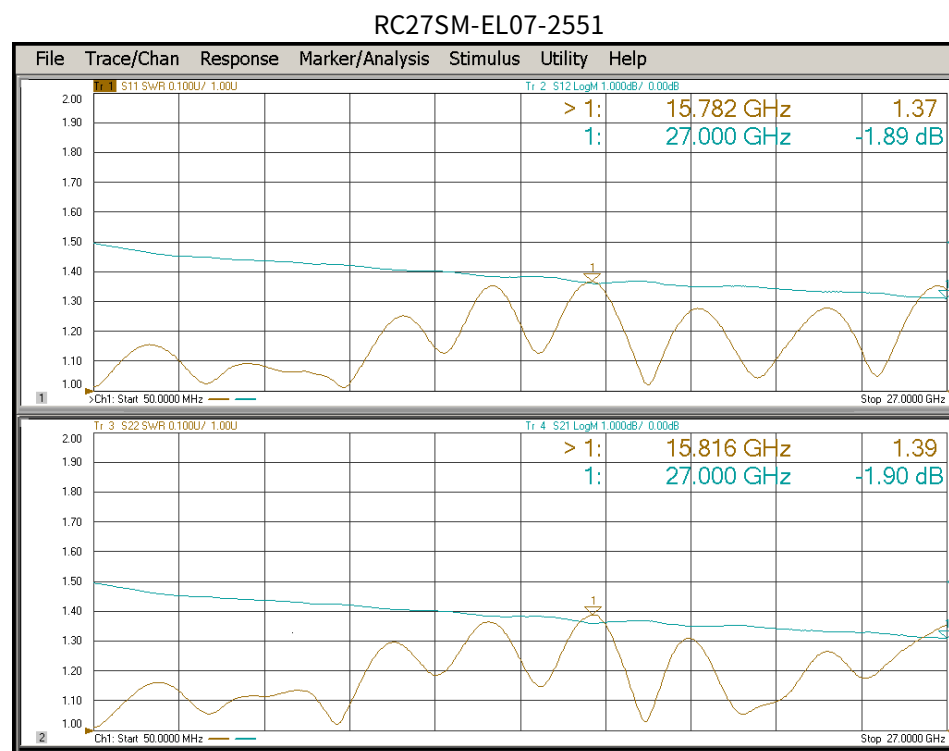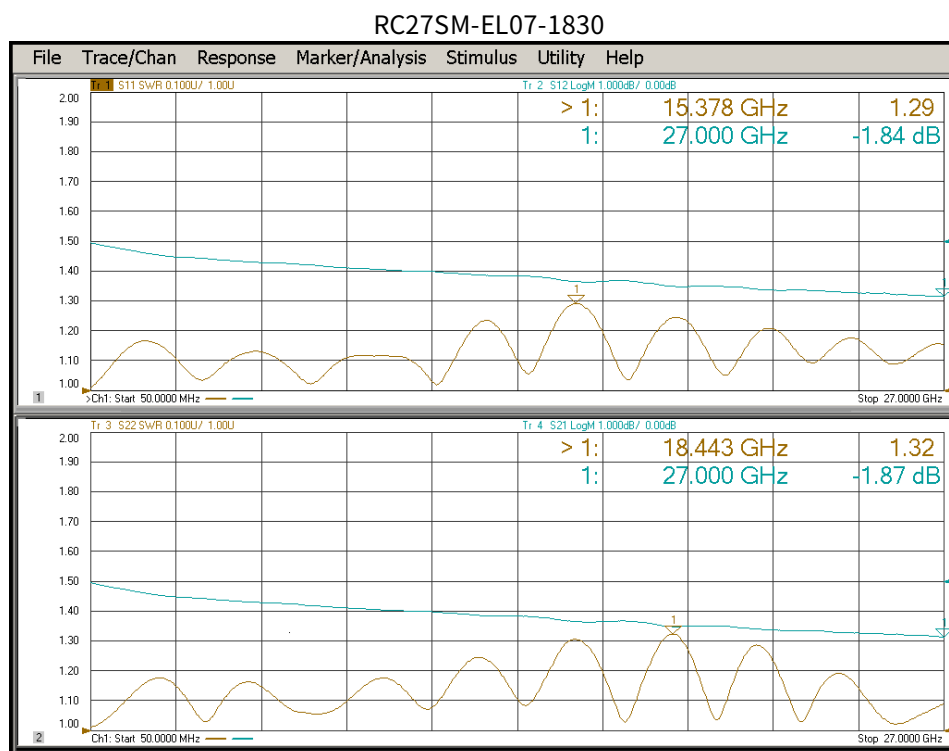

微信扫描  
关注我们

RFTOP®频优微波  
高品质微波毫米波器件供应商

www.rftop.cn  
service@rftop.com 0755-88840350

微信扫描  
在线咨询

