


## 3.5mm Female Cable Connector, RC34QF-BY280

### DC-34GHz, Straight, Bulkhead, Attachment for .086、 Cable

#### Dimensions(mm) Tolerance $\pm 1\%$

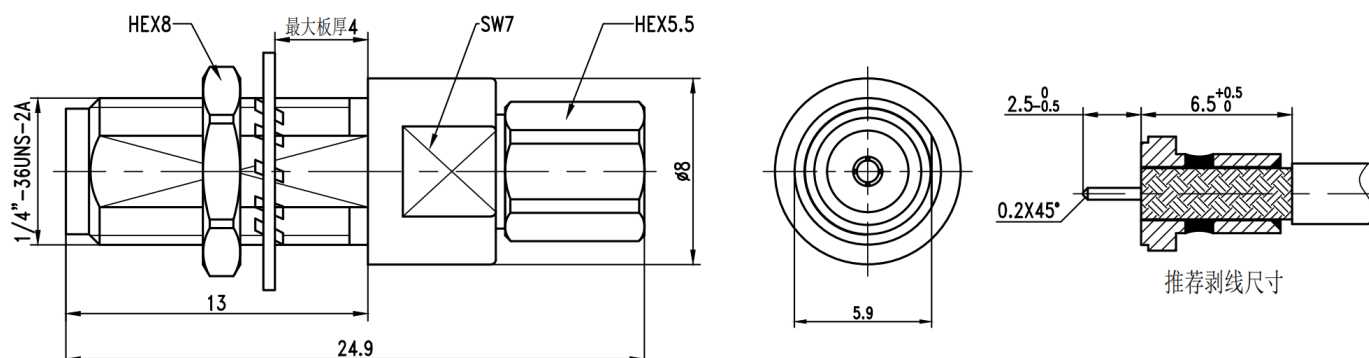

#### Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-34GHz     | Impedance         | 50 ohm         |
| VSWR            | -            | Withstand Voltage | 500 V          |
| Mating Cycles   | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

#### Mechanical & Product Information

|                |                                 |                   |              |
|----------------|---------------------------------|-------------------|--------------|
| Product Number | RC34QF-BY280, H-Grade           | Connector         | 3.5mm Female |
| Shape/Mounting | Straight , Bulkhead             | Attachment Method | Solder       |
| Attachment for | .086、 Series Cable              |                   |              |
| Connector Body | Passivated stainless steel 316F | Insulator         | PEI          |
| Center Contact | Gold plated beryllium copper    |                   |              |
| Dimension      | 24.9(L)mm                       | Net Weight        | -            |