


3.5mm Female Cable Connector, RC34QFB-B086E DC-34GHz, Straight, Attachment for 086、CNT280 Cable

Dimensions(mm) Tolerance±1%

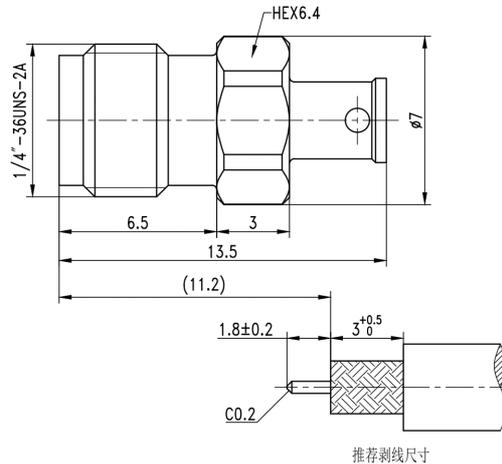

Electrical & Environmental

| | | | |
|------------------------|---|--------------------------|----------------|
| Frequency Range | DC-34GHz | Impedance | 50 ohm |
| VSWR | 1.35 Max (26.5-34GHz); 1.3 max (DC-26.5GHz) | Withstand Voltage | 500 V |
| Mating Cycles | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

Mechanical & Product Information

| | | | |
|-----------------------|--|--------------------------|--------------|
| Product Number | RC34QFB-B086E, P-Grade | Connector | 3.5mm Female |
| Shape/Mounting | Straight | Attachment Method | Solder |
| Attachment for | 086、CNT280 Series Cable | | |
| Connector Body | Gold plated beryllium copper/Gold plated brass | Insulator | PEI |
| Center Contact | Gold plated beryllium copper | | |
| Dimension | 13.5(L)mm | Net Weight | - |