


## 3.5mm Female Cable Connector, RC34QFB-B2

### DC-34GHz, Straight, Attachment for .086、CNT280 Cable

Dimensions(mm) Tolerance $\pm 1\%$

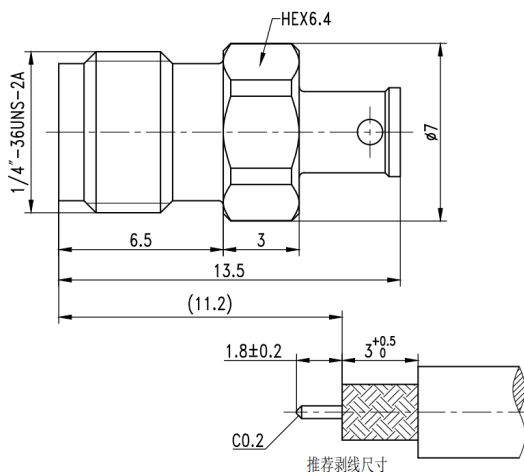

## Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-34GHz     | Impedance         | 50 ohm         |
| VSWR            | 1.35 max     | Withstand Voltage | 500 V          |
| Mating Cycles   | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

## Mechanical & Product Information

|                |                                                |                   |              |
|----------------|------------------------------------------------|-------------------|--------------|
| Product Number | RC34QFB-B2, H-Grade                            | Connector         | 3.5mm Female |
| Shape/Mounting | Straight                                       | Attachment Method | Solder       |
| Attachment for | .086、CNT280 Series Cable                       |                   |              |
| Connector Body | Gold plated beryllium copper/Gold plated brass | Insulator         | PEI          |
| Center Contact | Gold plated beryllium copper                   |                   |              |
| Dimension      | 13.5(L)mm                                      | Net Weight        | -            |