


## 3.5mm Male Cable Connector, RC34QM-B260KJ

DC-34GHz, Straight, Attachment for LHF-260, 配接铠甲: PAK-001 Cable

### Dimensions(mm) Tolerance $\pm 1\%$

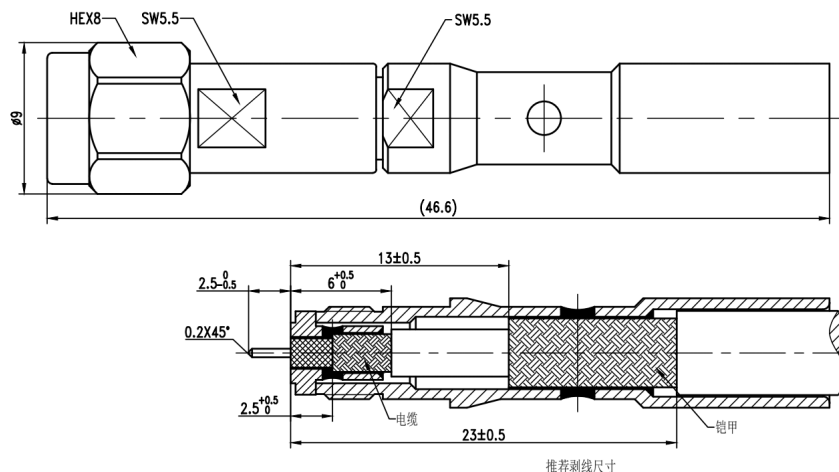

### Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-34GHz     | Impedance         | 50 ohm         |
| VSWR            | 1.35 max     | Withstand Voltage | 500 V          |
| Mating Cycles   | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

### Mechanical & Product Information

|                |                                                      |                   |            |
|----------------|------------------------------------------------------|-------------------|------------|
| Product Number | RC34QM-B260KJ, H-Grade                               | Connector         | 3.5mm Male |
| Shape/Mounting | Straight                                             | Attachment Method | Solder     |
| Attachment for | LHF-260, 配接铠甲: PAK-001 Series Cable                  |                   |            |
| Connector Body | Passivated stainless steel<br>316F/Gold plated brass | Insulator         | PEI        |
| Center Contact | Gold plated beryllium copper                         |                   |            |
| Dimension      | 46.6(L)mm                                            | Net Weight        | -          |