


3.5mm Male Cable Connector, RC34QM-B520KJ

DC-34GHz, Straight, Attachment for FlexPro-L、LHS-520, 配接铠甲:
KJB55-PTFE(K2-780) Cable

Dimensions(mm) Tolerance $\pm 1\%$

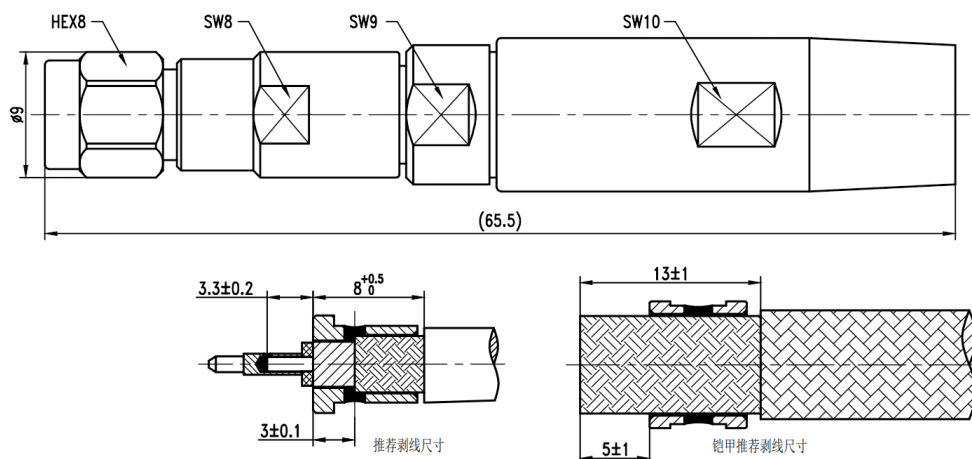

Electrical & Environmental

Frequency Range	DC-34GHz	Impedance	50 ohm
VSWR	-	Withstand Voltage	1000 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC34QM-B520KJ, H-Grade	Connector	3.5mm Male
Shape/Mounting	Straight	Attachment Method	Solder
Attachment for	FlexPro-L、LHS-520, 配接铠甲: KJB55-PTFE(K2-780) Series Cable		
Connector Body	Passivated stainless steel 316F	Insulator	PEI
Center Contact	Gold plated beryllium copper		
Dimension	65.5(L)mm	Net Weight	-