


## 3.5mm Male Cable Connector, **RC34QM-BA480W** DC-34GHz, Straight, Attachment for CNA480-W Cable

### Dimensions(mm) Tolerance $\pm 1\%$

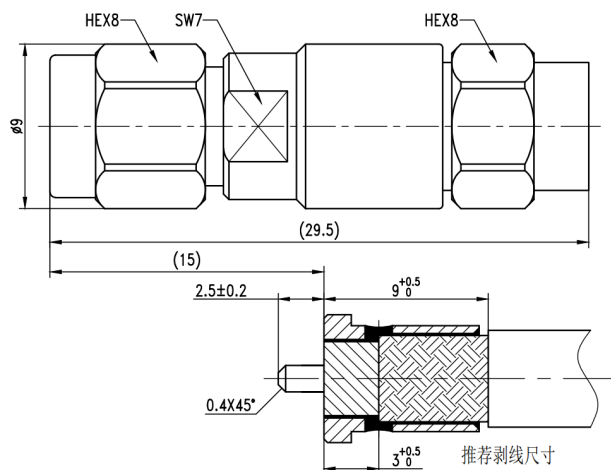

### Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-34GHz     | Impedance         | 50 ohm         |
| VSWR            | 1.35 max     | Withstand Voltage | 1000 V         |
| Mating Cycles   | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

### Mechanical & Product Information

|                |                                 |                   |            |
|----------------|---------------------------------|-------------------|------------|
| Product Number | RC34QM-BA480W, H-Grade          | Connector         | 3.5mm Male |
| Shape/Mounting | Straight                        | Attachment Method | Solder     |
| Attachment for | CNA480-W Series Cable           |                   |            |
| Connector Body | Passivated stainless steel 316F | Insulator         | PEI        |
| Center Contact | Gold plated beryllium copper    |                   |            |
| Dimension      | 29.5(L)mm                       | Net Weight        | -          |