


2.92mm Female Field Replaceable Connector, RC40F-UYD-XX DC-40GHz, Straight, Bulkhead

Dimensions(mm) Tolerance $\pm 1\%$

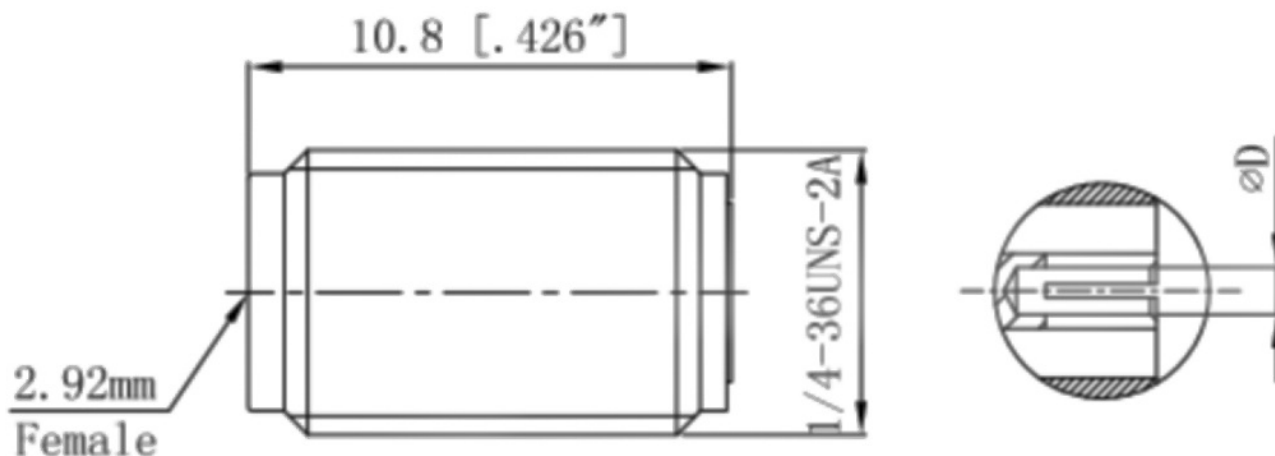

Product Selection

D(mm)	RFTOP P/N
0.23	RC40F-UYD-023
0.30	RC40F-UYD-030
0.38	RC40F-UYD-038
0.51	RC40F-UYD-051

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Withstand Voltage	1000 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C~+125°C

Mechanical & Product Information

Product Number	RC40F-UYD-XX	Connector	2.92mm(K,SK) Female
Shape/Mounting	Straight , Bulkhead	Attachment Method	Field Replaceable
Connector Body	Passivated stainless steel	Insulator	PEI
Center Contact	Gold plated beryllium copper		
Dimension	10.8(L)mm	Net Weight	-