


2.92mm Female PCB Connector, RC40FHSP-VLM03
DC-40GHz, Straight, 2 hole flange, 7.16mm Hole Spacing, 0.3mm Pin

Dimensions(mm) Tolerance±1%

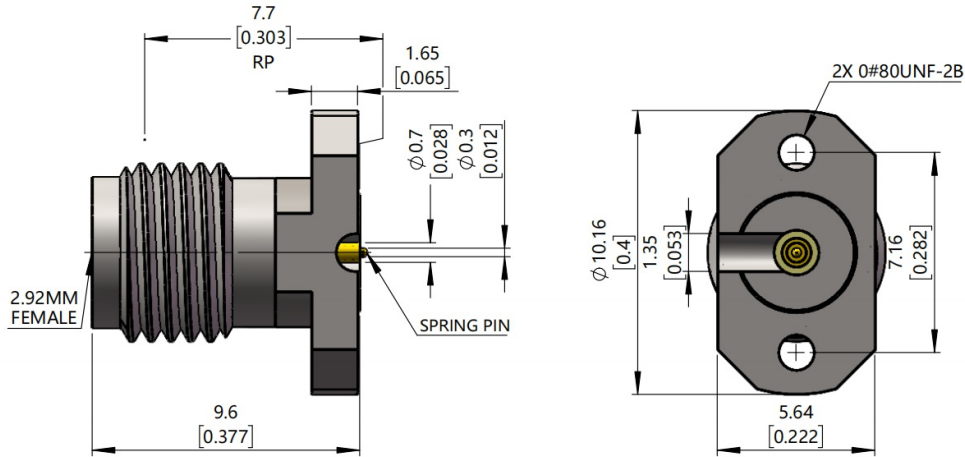


Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 Max	Withstand Voltage	-
Mating Cycles	> 500 Cycles	Temperature Range	-55°C~+165°C

Mechanical & Product Information

Product Number	RC40FHSP-VLM03, U-Grade	Connector	2.92mm(K,SK) Female
Shape/Mounting	Straight , 2 hole flange	Attachment Method	Clamp
Connector Body	Passivated stainless steel	Insulator	ULTEM
Center Contact	Gold plated beryllium copper		
Dimension	9.6(L)mm	Net Weight	-



2.92mm Female PCB Connector, RC40FHSP-VLM03
DC-40GHz, Straight, 2 hole flange, 7.16mm Hole Spacing, 00.3mm Pin

Typical Data

