


2.92mm Female Cable Connector, RC40KF-B2F2B

DC-40GHz, Straight, 4 hole flange, Attachment for .086、HT280 Cable

Dimensions(mm) Tolerance $\pm 1\%$

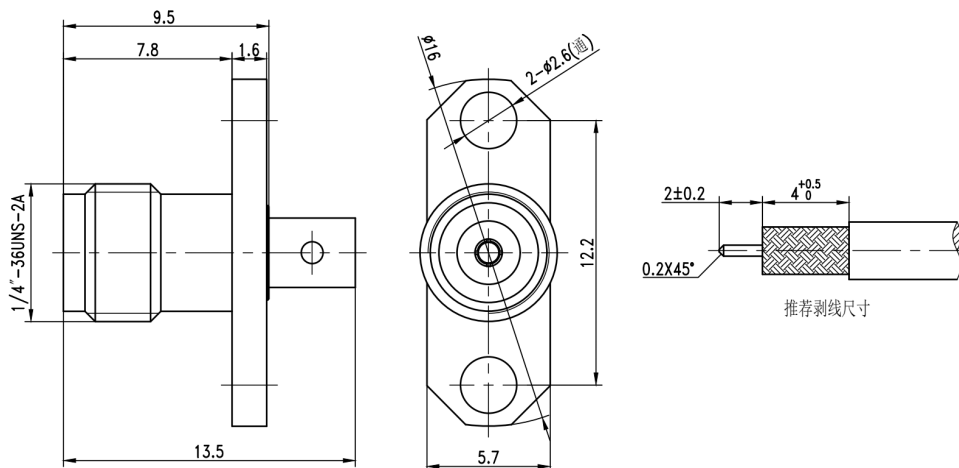

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	-	Withstand Voltage	750 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC40KF-B2F2B, H-Grade	Connector	2.92mm(K,SK) Female
Shape/Mounting	Straight , 4 hole flange	Attachment Method	Solder
Attachment for	.086、HT280 Series Cable		
Connector Body	Passivated stainless steel 316F	Insulator	PEI
Center Contact	Gold plated beryllium copper		
Dimension	13.5(L)mm	Net Weight	-