


2.92mm Female Field Replaceable Connector, RC40KF-UF2D04-XX DC-40GHz, Straight, 2 hole flange, 12.2mm Hole Spacing

Dimensions(mm) Tolerance $\pm 1\%$

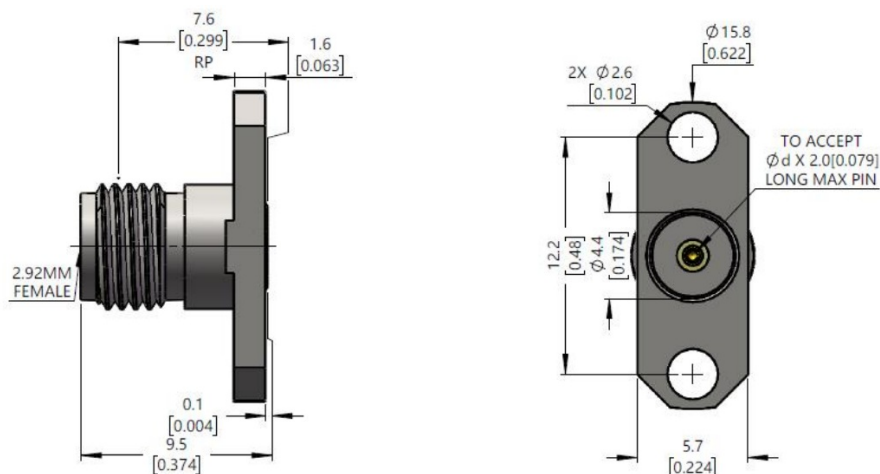

Product Selection

D(mm)	RFTOP P/N
0.23	RC40KF-UF2D04-023
0.30	RC40KF-UF2D04-030
0.38	RC40KF-UF2D04-038
0.46	RC40KF-UF2D04-046
0.51	RC40KF-UF2D04-051

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Withstand Voltage	750 V
Insulation Resistance	$\geq 5000 \text{ M}\Omega$	Contact Resistance	$\leq \text{In:}3.0/\text{Out:}2.0 \text{ m}\Omega$
Mating Cycles	> 500 Cycles	Temperature Range	-55°C~+165°C

Mechanical & Product Information

Product Number	RC40KF-UF2D04-XX	Connector	2.92mm(K,SK) Female
Shape/Mounting	Straight , 2 hole flange	Attachment Method	Field Replaceable
Connector Body	Passivated stainless steel	Insulator	PEI or PEI&PTFE
Center Contact	Gold plated beryllium copper		
Dimension	9.5(L)mm	Net Weight	About 2.0g