


## 2.92mm Male Cable Connector, RC40KM-B220AKJ

DC-40GHz, Straight, Attachment for CXN3506、CNA220, 配接铠甲:  
KJB40-PTFE Cable

### Dimensions(mm) Tolerance $\pm 1\%$

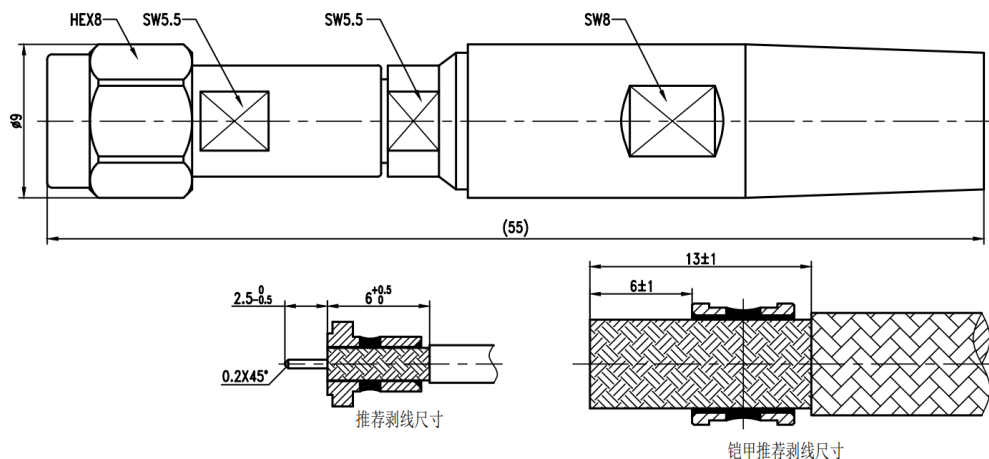

### Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-40GHz     | Impedance         | 50 ohm         |
| VSWR            | 1.3 max      | Withstand Voltage | 500 V          |
| Mating Cycles   | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

### Mechanical & Product Information

|                |                                               |                   |                   |
|----------------|-----------------------------------------------|-------------------|-------------------|
| Product Number | RC40KM-B220AKJ, H-Grade                       | Connector         | 2.92mm(K,SK) Male |
| Shape/Mounting | Straight                                      | Attachment Method | Solder            |
| Attachment for | CXN3506、CNA220, 配接铠甲: KJB40-PTFE Series Cable |                   |                   |
| Connector Body | Passivated stainless steel 316F               | Insulator         | PEI               |
| Center Contact | Gold plated beryllium copper                  |                   |                   |
| Dimension      | 55(L)mm                                       | Net Weight        | -                 |