


2.92mm Male Cable Connector, RC40KM-B330BKJ

DC-40GHz, Straight, Attachment for CNC360, 配接铠甲: KJB40-PTFE Cable

Dimensions(mm) Tolerance $\pm 1\%$

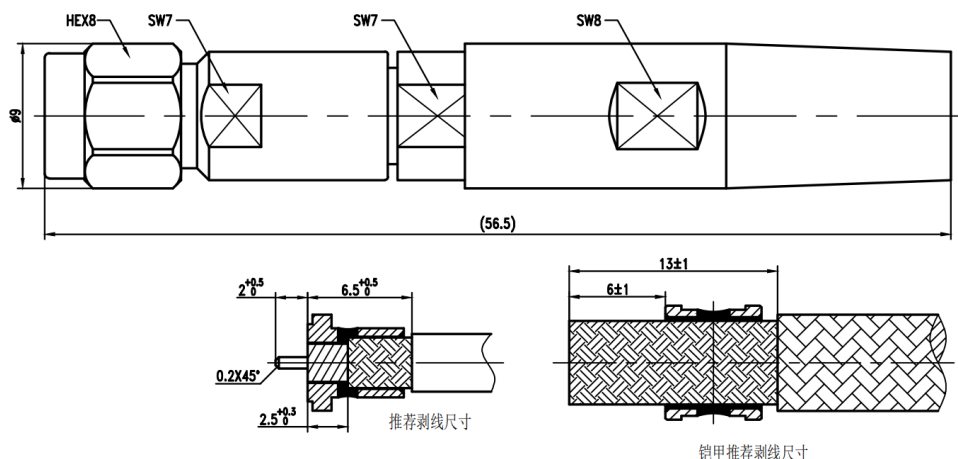

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.3 max	Withstand Voltage	1000 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC40KM-B330BKJ, H-Grade	Connector	2.92mm(K,SK) Male
Shape/Mounting	Straight	Attachment Method	Solder
Attachment for	CNC360, 配接铠甲: KJB40-PTFE Series Cable		
Connector Body	Passivated stainless steel 316F	Insulator	PEI
Center Contact	Gold plated beryllium copper		
Dimension	56.5(L)mm	Net Weight	-