




2.92mm公2孔法兰毫米波PCB End Launch免焊连接器, RC40KM-EL07-XX DC-40GHz, 安装孔距9.5mm

结构尺寸图 (单位: mm) 误差±1%

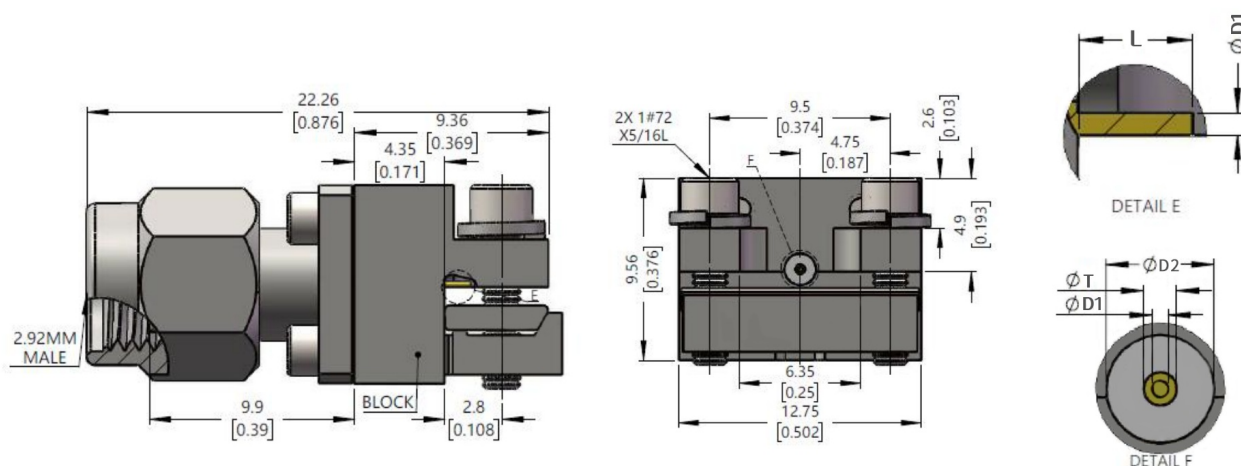

产品规格选型表

D1(mm)	L(mm)	D2(mm)	T(mm)	RFTOP P/N
0.13	0.75	0.75	0.23	RC40KM-EL07-1323
0.18	0.75	1.00	0.30	RC40KM-EL07-1830
0.23	0.75	0.75	0.23	RC40KM-EL07-2323
0.25	1.27	1.66	0.51	RC40KM-EL07-2551

电气与环境性能

频率范围	DC-40GHz	特性阻抗	50 ohm
电压驻波比	1.2 Max (PCB Test 1.4 Max)	介质耐压	750 V
绝缘电阻	$\geq 5000 \text{ M}\Omega$	接触电阻	$\leq \text{In:3.0/Out:2.0 m}\Omega$
耐久性	> 500 次	工作温度	-55°C~+165°C

产品和材料信息

产品型号	RC40KM-EL07-XX	接头类型	2.92mm(K,SK) 公
外形结构	Straight, 2 hole flange	安装方式	Clamp
连接器主体	Passivated stainless steel	绝缘支撑	PEI or PEI&PTFE
内导体	Gold plated beryllium copper		
外形尺寸	18.86(L)*12.75(W)*9.56(W)mm	产品净重	-



微信扫描
关注我们

RFTOP®频优微波
高品质微波毫米波器件供应商

www.rftop.cn
service@rftop.com 0755-88840350



微信扫描
在线咨询





2.92mm公2孔法兰毫米波PCB End Launch免焊连接器, RC40KM-EL07-XX DC-40GHz, 安装孔距9.5mm

典型曲线

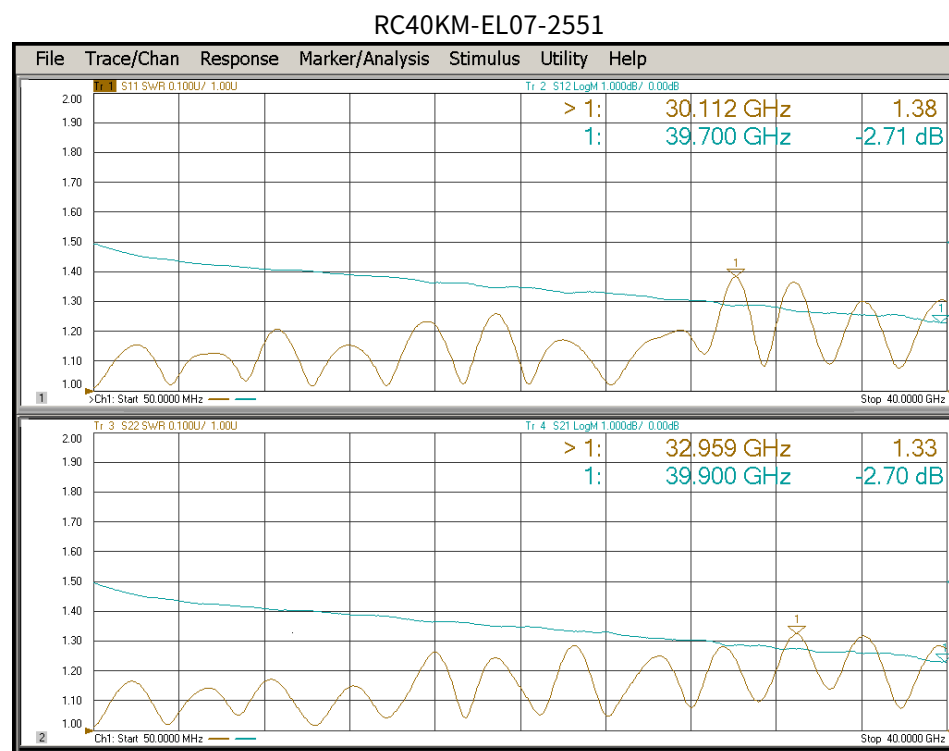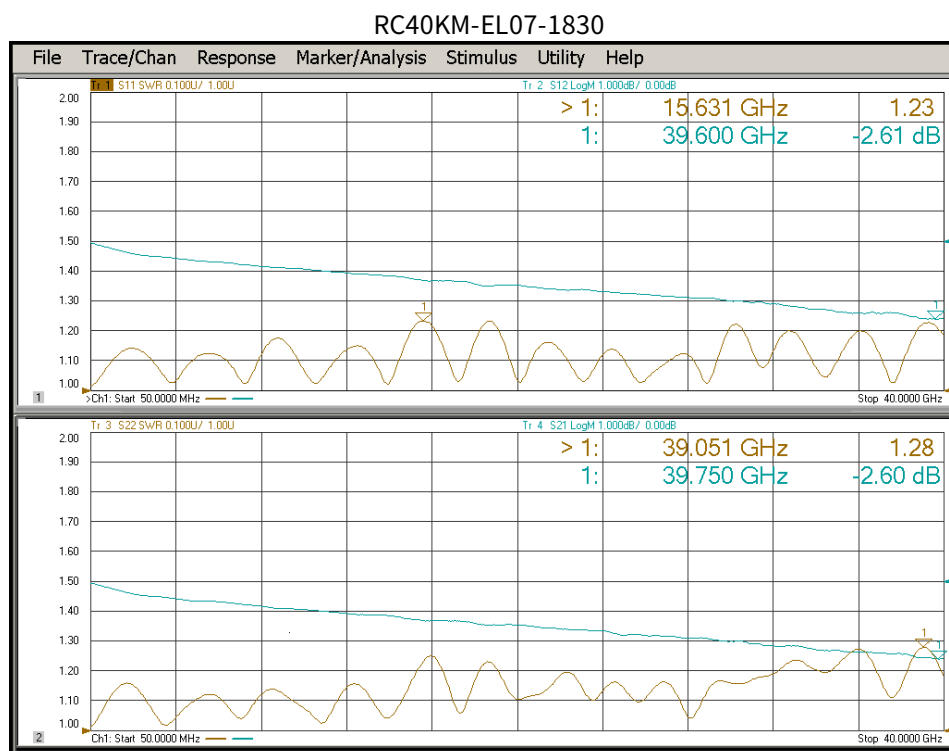

微信扫描
关注我们

RFTOP®频优微波
高品质微波毫米波器件供应商

www.rftop.cn
service@rftop.com 0755-88840350

微信扫描
在线咨询

