SMP Female Cable Connector, RC40PFB-B2F086E
DC-40GHz, Straight, 2 hole flange, Attachment for 086、RG405 Cable

Dimensions(mm) Tolerance±1%

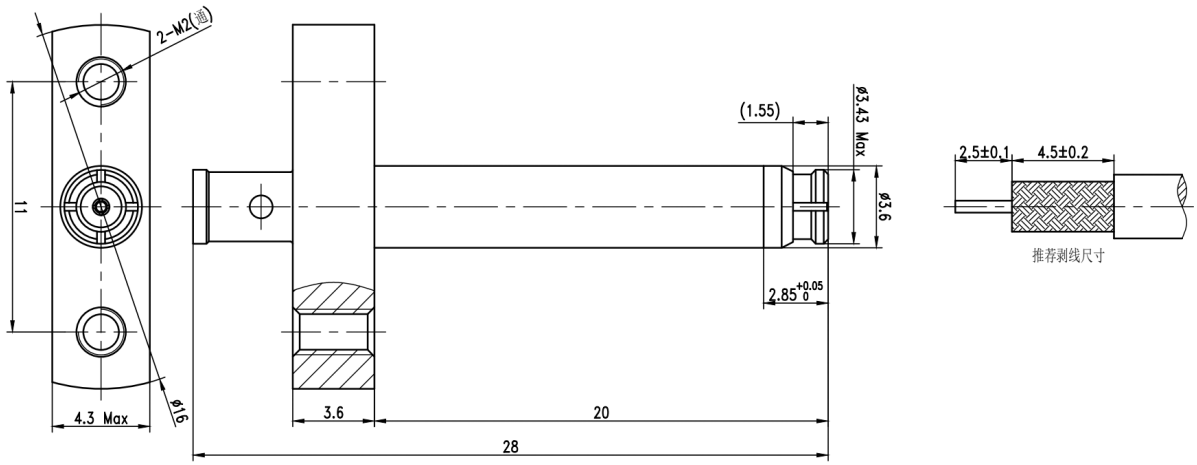

Electrical & Environmental

Frequency Range	DC-40GHz	**Impedance**	50 ohm
VSWR	-	**Withstand Voltage**	500 V
Mating Cycles	> 500 Cycles	**Temperature Range**	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC40PFB-B2F086E, P-Grade	**Connector**	SMP(GPO) Female
Shape/Mounting	Straight , 2 hole flange	**Attachment Method**	Solder
Attachment for	086、RG405 Series Cable		
Connector Body	Gold plated brass	**Insulator**	PTFE
Center Contact	Gold plated beryllium copper		
Dimension	28(L)mm	**Net Weight**	-