


SMP Female Cable Connector, RC40PFB-B2F2

DC-40GHz, Straight, 2 hole flange, Attachment for .086、RG-405 Cable

Dimensions(mm) Tolerance $\pm 1\%$

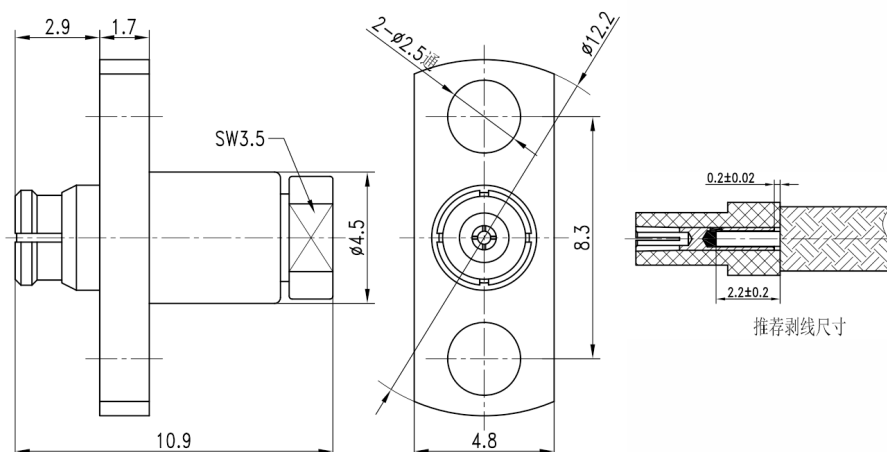

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	-	Withstand Voltage	500 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC40PFB-B2F2, H-Grade	Connector	SMP(GPO) Female
Shape/Mounting	Straight , 2 hole flange	Attachment Method	Solder
Attachment for	.086、RG-405 Series Cable		
Connector Body	Gold plated brass	Insulator	PTFE
Center Contact	Gold plated beryllium copper		
Dimension	10.9(L)mm	Net Weight	-