


## SMP Male Cable Connector, RC40PM-B220

### DC-40GHz, Straight, Attachment for CXN3506、HA220 Cable

#### Dimensions(mm) Tolerance $\pm 1\%$

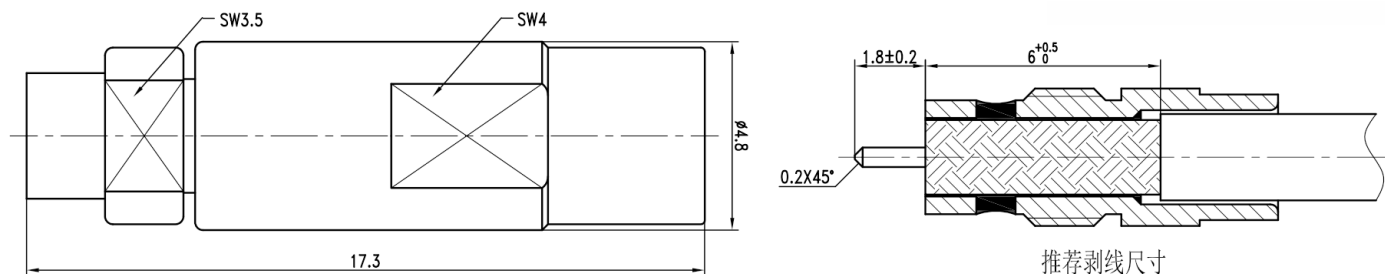

#### Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-40GHz     | Impedance         | 50 ohm         |
| VSWR            | -            | Withstand Voltage | 500 V          |
| Mating Cycles   | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

#### Mechanical & Product Information

|                |                                 |                   |               |
|----------------|---------------------------------|-------------------|---------------|
| Product Number | RC40PM-B220, H-Grade            | Connector         | SMP(GPO) Male |
| Shape/Mounting | Straight                        | Attachment Method | Solder        |
| Attachment for | CXN3506、HA220 Series Cable      |                   |               |
| Connector Body | Passivated stainless steel 316F | Insulator         | PTFE          |
| Center Contact | Gold plated beryllium copper    |                   |               |
| Dimension      | 17.3(L)mm                       | Net Weight        | -             |