


SSMA Male Cable Connector, RC40SAMB-BG316C DC-40GHz, Straight, Attachment for RG316 Cable

Dimensions(mm) Tolerance $\pm 1\%$

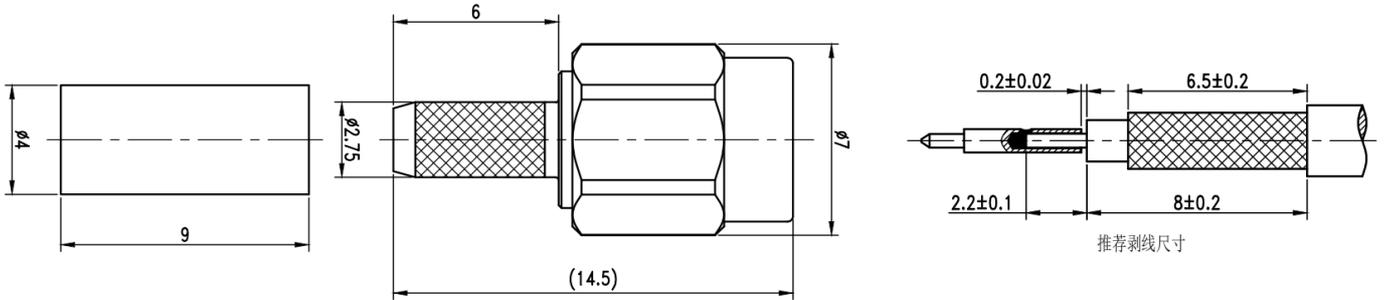

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	-	Withstand Voltage	500 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC40SAMB-BG316C, P-Grade	Connector	SSMA Male
Shape/Mounting	Straight	Attachment Method	Crimp
Attachment for	RG316 Series Cable		
Connector Body	Gold plated brass	Insulator	PTFE
Center Contact	Gold plated beryllium copper		
Dimension	14.5(L)mm	Net Weight	-