


SSMP Female Cable Connector, RC40SPFB-BA220E DC-40GHz, Straight, Attachment for RCA220、CXN3506 Cable

Dimensions(mm) Tolerance±1%

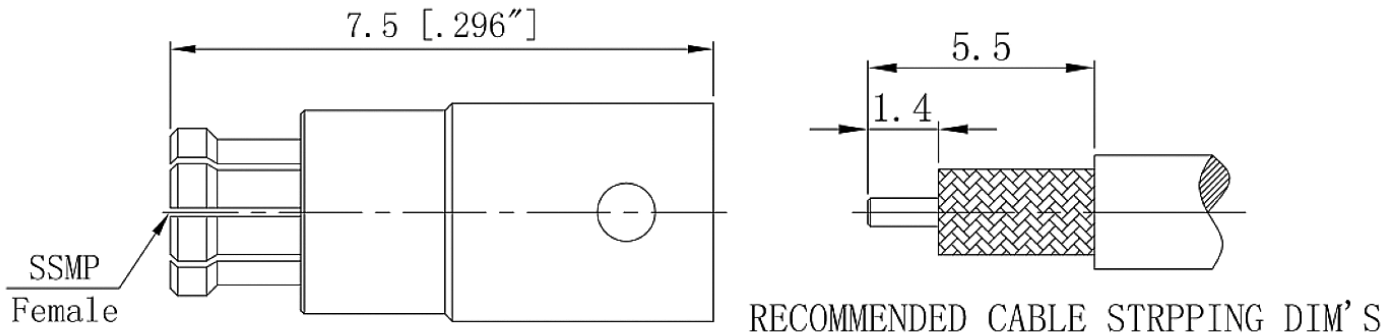

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.35 Max (18-40GHz); 1.25 max (DC-18GHz)	Withstand Voltage	325 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C~+125°C

Mechanical & Product Information

Product Number	RC40SPFB-BA220E, Direct welding	Connector	SSMP(GPPO,SMPM) Female
Shape/Mounting	Straight	Attachment Method	Solder
Attachment for	RCA220、CXN3506 Series Cable		
Connector Body	Gold plated beryllium copper	Insulator	PTFE
Center Contact	Gold plated beryllium copper		
Dimension	7.5(L)mm	Net Weight	-