


## 2.4mm母头2孔法兰毫米波介质穿墙连接器, RC50UF-PF2D04-XX DC-50GHz, 安装孔距12.2mm

结构尺寸图（单位：mm）误差±1%

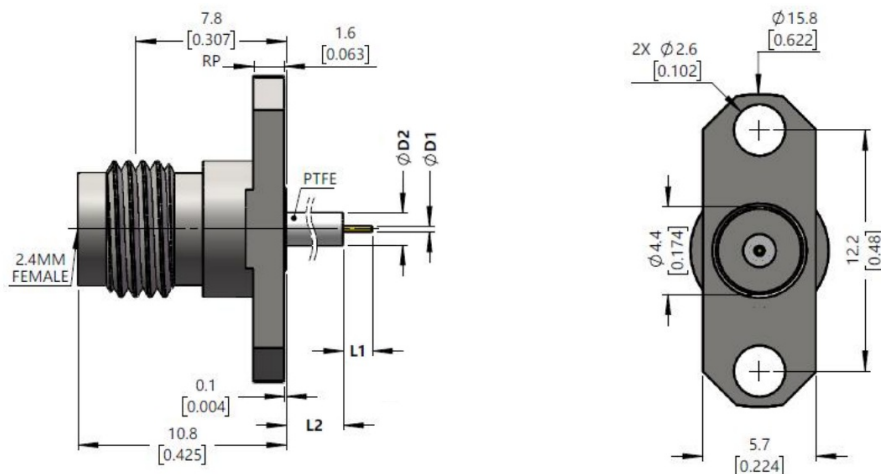

产品规格选型表

| D1(mm) | L1(mm) | D2(mm) | L2(mm) | RFTOP P/N          |
|--------|--------|--------|--------|--------------------|
| 0.30   | 1.50   | 1.67   | 3.00   | RC50UF-PF2D04-0302 |
| 0.60   | 1.27   | 2.00   | 6.35   | RC50UF-PF2D04-0601 |
| 0.60   | 1.90   | 2.00   | 5.10   | RC50UF-PF2D04-0602 |
| 0.60   | 3.40   | 2.00   | 3.50   | RC50UF-PF2D04-0603 |
| 0.60   | 2.90   | 2.00   | 4.00   | RC50UF-PF2D04-0604 |

### 电气与环境性能

|       |           |      |                     |
|-------|-----------|------|---------------------|
| 频率范围  | DC-50GHz  | 特性阻抗 | 50 ohm              |
| 电压驻波比 | 1.2 max   | 介质耐压 | 750 V               |
| 绝缘电阻  | ≥ 5000 MΩ | 接触电阻 | ≤ In:3.0/Out:2.0 mΩ |
| 耐久性   | > 500 次   | 工作温度 | -55°C~+165°C        |

### 产品和材料信息

|       |                              |      |                 |
|-------|------------------------------|------|-----------------|
| 产品型号  | RC50UF-PF2D04-XX             | 接头类型 | 2.4mm 母头        |
| 外形结构  | Straight , 2 hole flange     | 安装方式 | Solder          |
| 连接器主体 | Passivated stainless steel   | 绝缘支撑 | PEI or PEI&PTFE |
| 内导体   | Gold plated beryllium copper |      |                 |




微信扫描  
关注我们

RFTOP®频优微波  
高品质微波毫米波器件供应商

www.rftop.cn  
service@rftop.com 0755-88840350


微信扫描  
在线咨询





## 2.4mm母头2孔法兰毫米波介质穿墙连接器, RC50UF-PF2D04-XX DC-50GHz, 安装孔距12.2mm

### 典型测试数据

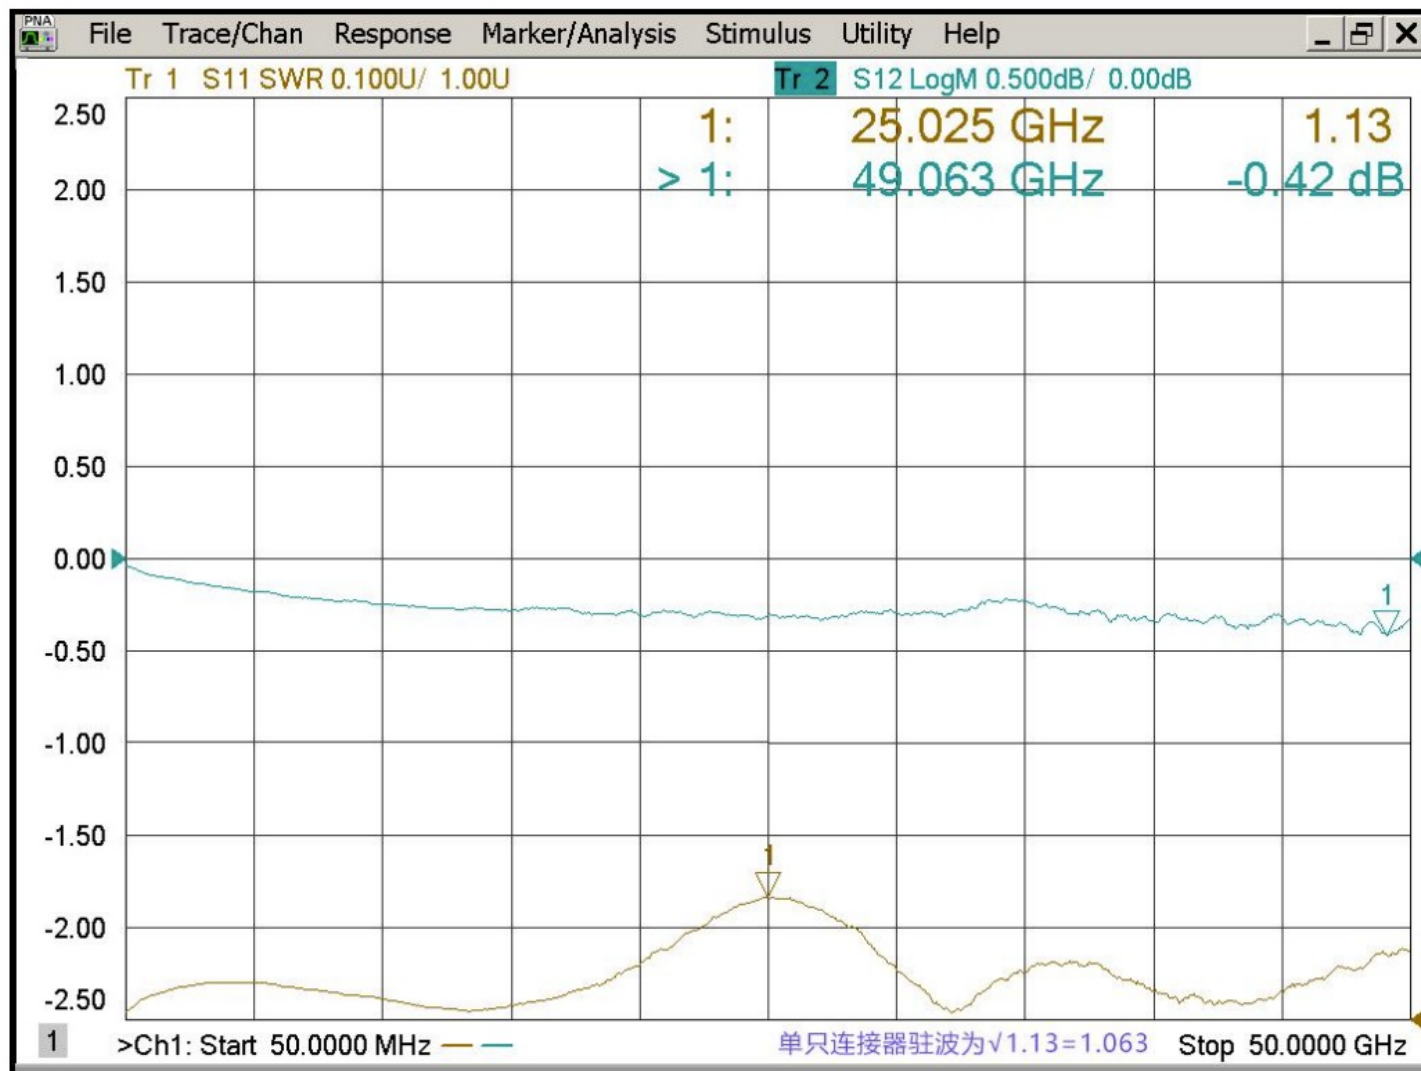

微信扫描  
关注我们

RFTOP®频优微波  
高品质微波毫米波器件供应商

www.rftop.cn  
service@rftop.com 0755-88840350

微信扫描  
在线咨询

