


## 2.4mm Male Cable Connector, RC50UMW-B330A DC-50GHz, Right Angle, Attachment for CNC360 Cable

### Dimensions(mm) Tolerance $\pm 1\%$

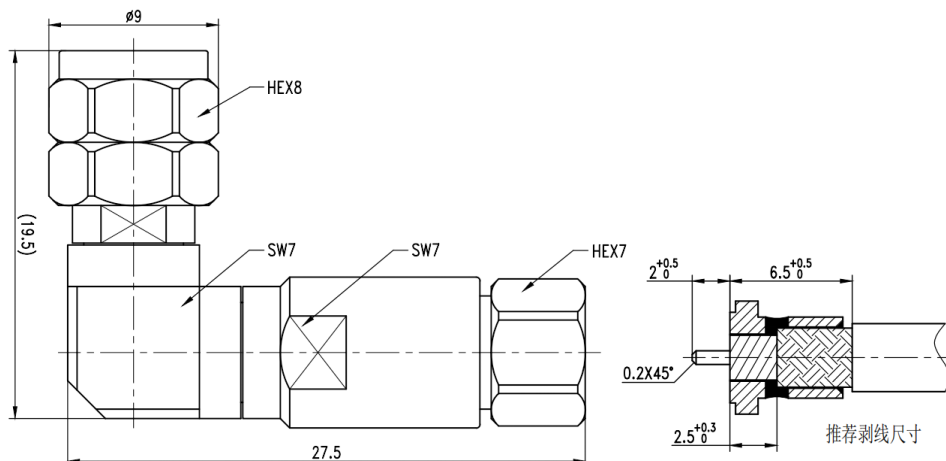

### Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-50GHz     | Impedance         | 50 ohm         |
| VSWR            | 1.35 max     | Withstand Voltage | 500 V          |
| Mating Cycles   | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

### Mechanical & Product Information

|                |                                                |                   |            |
|----------------|------------------------------------------------|-------------------|------------|
| Product Number | RC50UMW-B330A, H-Grade                         | Connector         | 2.4mm Male |
| Shape/Mounting | Right Angle                                    | Attachment Method | Solder     |
| Attachment for | CNC360 Series Cable                            |                   |            |
| Connector Body | Passivated stainless steel 316F                | Insulator         | PEI/PTFE   |
| Center Contact | Gold plated beryllium copper/Gold plated brass |                   |            |
| Dimension      | 19.5(L)*27.5(W)mm                              | Net Weight        | -          |