




1.85mm Female Field Replaceable Connector, RC67VF-UYD01-XX DC-67GHz, Straight, Bulkhead

Dimensions(mm) Tolerance $\pm 1\%$

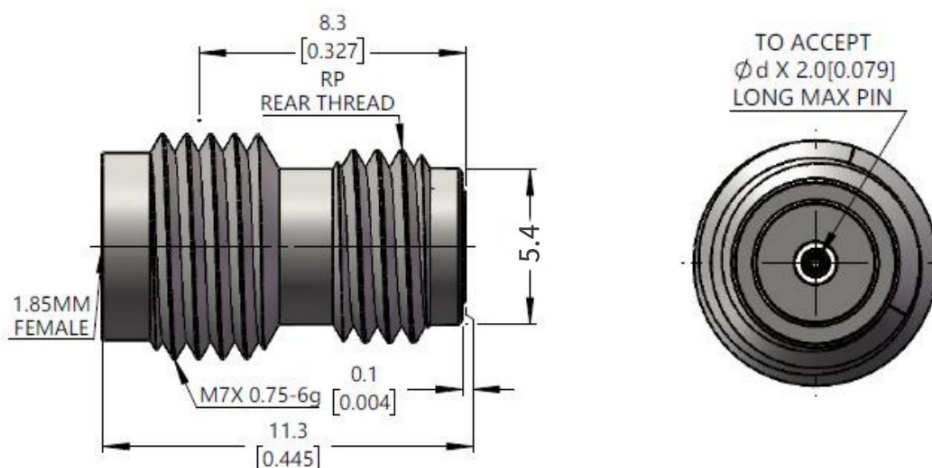

Product Selection

D(mm)	RFTOP P/N
0.23	RC67VF-UYD01-023
0.30	RC67VF-UYD01-030

Electrical & Environmental

Frequency Range	DC-67GHz	Impedance	50 ohm
VSWR	1.25 Max GOOD VSWR:1.15	Withstand Voltage	750 V
Insulation Resistance	$\geq 5000 \text{ M}\Omega$	Contact Resistance	$\leq \text{In:}3.0/\text{Out:}2.0 \text{ m}\Omega$
Mating Cycles	> 500 Cycles	Temperature Range	-55°C~+165°C

Mechanical & Product Information

Product Number	RC67VF-UYD01-XX	Connector	1.85mm Female
Shape/Mounting	Straight , Bulkhead	Attachment Method	Solder
Connector Body	Passivated stainless steel	Insulator	PEI
Center Contact	Gold plated beryllium copper		
Dimension	11.3(L)*5.4(ϕ)mm	Net Weight	-



1.85mm Female Field Replaceable Connector, RC67VF-UYD01-XX DC-67GHz, Straight, Bulkhead

Typical Data

