


MMCX Male Cable Connector, RC6MMCMCMB-B220

DC-6GHz, Straight, Attachment for 3506 Cable

Dimensions(mm) Tolerance $\pm 1\%$

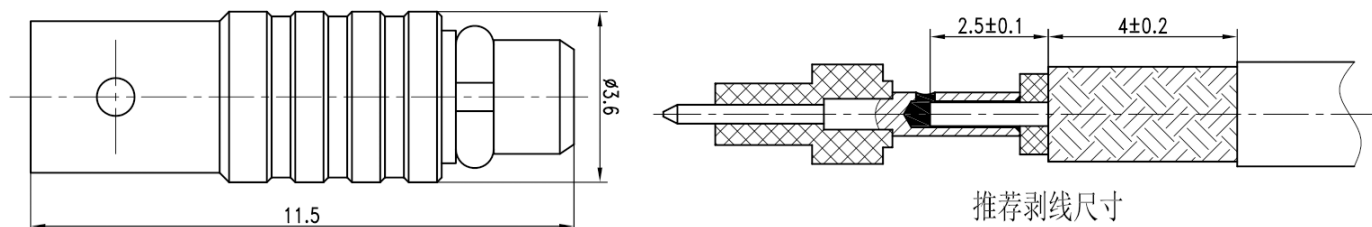

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	-	Withstand Voltage	500 V
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +165°C

Mechanical & Product Information

Product Number	RC6MMCMCMB-B220, P-Grade	Connector	MMCX Male
Shape/Mounting	Straight	Attachment Method	Solder
Attachment for	3506 Series Cable		
Connector Body	Gold plated brass	Insulator	PTFE
Center Contact	Gold plated beryllium copper		
Dimension	11.5(L)mm	Net Weight	-