


## N Male Cable Connector, RC6NMB-B7

### DC-6GHz, Straight, Attachment for LMR-400、50-7 Cable

Dimensions(mm) Tolerance $\pm 1\%$

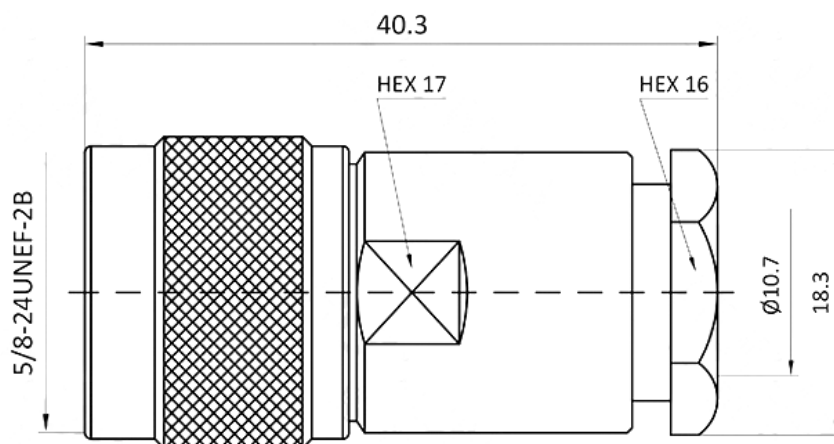

### Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-6GHz      | Impedance         | 50 ohm         |
| VSWR            | 1.25 Max     | Withstand Voltage | 1000 V         |
| Mating Cycles   | > 500 Cycles | Temperature Range | -45°C ~ +125°C |

### Mechanical & Product Information

|                |                           |                   |        |
|----------------|---------------------------|-------------------|--------|
| Product Number | RC6NMB-B7, E-Grade        | Connector         | N Male |
| Shape/Mounting | Straight                  | Attachment Method | Solder |
| Attachment for | LMR-400、50-7 Series Cable |                   |        |
| Connector Body | Nickel plated brass       | Insulator         | PTFE   |
| Center Contact | Gold plated brass         |                   |        |
| Dimension      | 40.3(L)mm                 | Net Weight        | -      |