


SSMA Female PCB Connector, RC6SFWB-STH08

DC-6GHz, Right Angle, 4.4mm Hole Spacing, 00.8mm Pin

Dimensions(mm) Tolerance $\pm 1\%$

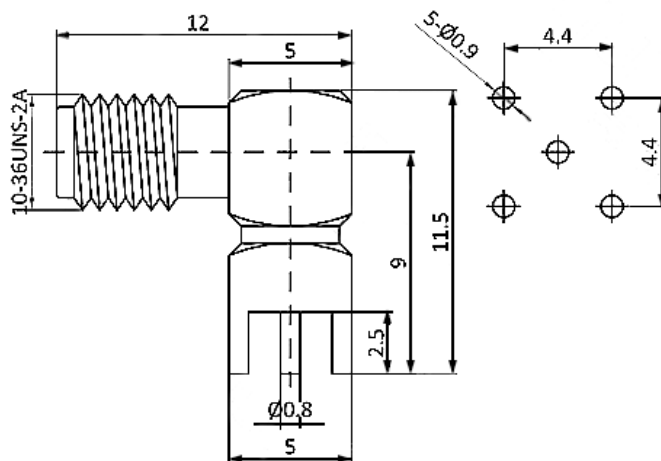

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	-	Withstand Voltage	750 V
Insulation Resistance	$\geq 5000 \text{ M}\Omega$	Contact Resistance	$\leq \text{In:}4.0/\text{Out:}2.5 \text{ m}\Omega$
Mating Cycles	> 500 Cycles	Temperature Range	-55°C ~ +125°C

Mechanical & Product Information

Product Number	RC6SFWB-STH08	Connector	SSMA Female
Shape/Mounting	Right Angle	Attachment Method	Solder
Connector Body	Gold plated brass	Insulator	PTFE
Center Contact	Gold plated brass		
Dimension	12(L) $\times$ 11.5(W)mm	Net Weight	-