


1.85mm Balun, RBLM10F67 10MHz-67GHz, 1W

Dimensions(mm) Tolerance $\pm 1\%$

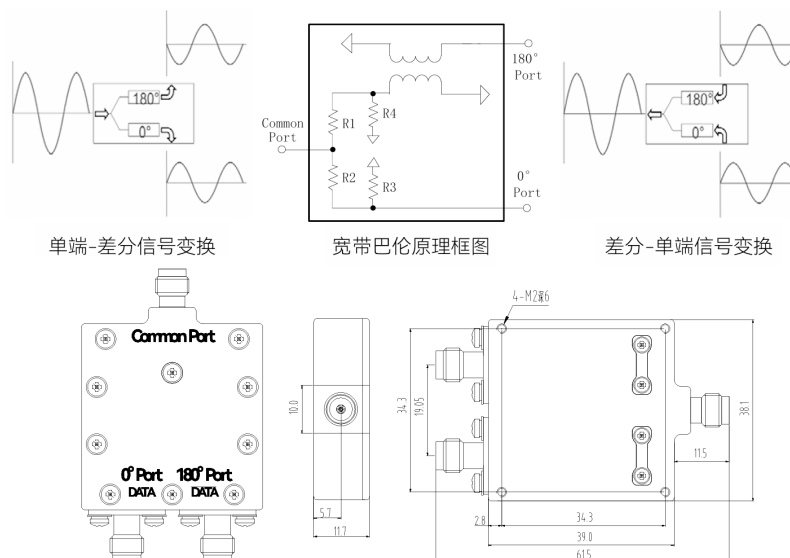

Electrical & Environmental

Frequency Range	10MHz-67GHz	Impedance	50 Ohm
VSWR Primary	1.4 Max (Typ.1.3)		
VSWR Secondary	2.1 Max (Typ.1.7)		
Insertion Loss	10.5dB Max (Typ.9.0dB; Sds21:7.5dBmax,Typ.6.5dB)		
Phase Balance	$\pm 6^\circ$ (Typ. $\pm 4^\circ$)		
Input Avg Power	1 Watts Max @25°C		
Peak Power	10W		
Operating Temp	-40°C~+70°C		

Mechanical & Product Information

Product Number	RBLM10F67	Product Type	Balun
Connector	1.85mm Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Grey paint		
Dimensions	39(L)×38.1(W)×11.7(H)mm	Net Weight	About 53.0g