


## SMA Directional Coupler, RDC002F052S-50

0.02-0.52GHz, Coupling 50dB, 50W

### Dimensions(mm) Tolerance±1%

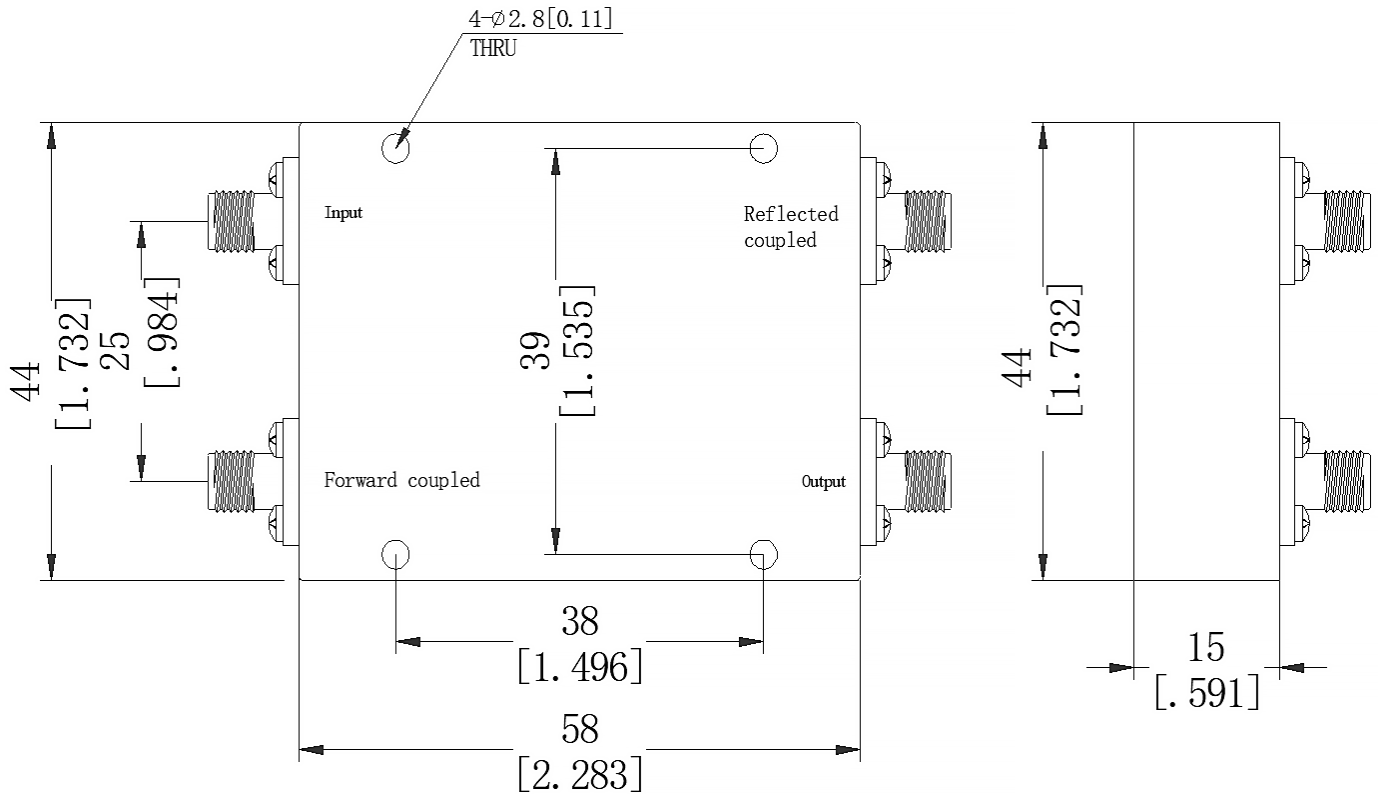

### Electrical & Environmental

<b>Frequency Range</b>	0.02-0.52GHz	<b>Impedance</b>	50 Ohm
<b>VSWR Primary</b>	1.25 Max		
<b>VSWR Secondary</b>	1.25 Max		
<b>Insertion Loss</b>	0.35dB Max		
<b>Directivity</b>	20dB Min		
<b>Frequency Sensitivity</b>	±0.6dB		
<b>Nominal Coupling</b>	50±1.0dB		
<b>Input Avg Power</b>	50 Watts max @25°C (Derate linearly to 5 Watt at 100°C)		
<b>Operating Temp</b>	-45°C~85°C		

### Mechanical & Product Information

<b>Product Number</b>	RDC002F052S-50	<b>Product Type</b>	Directional Coupler
<b>Connector</b>	SMA Female	<b>Connector Body</b>	Passivated stainless steel
<b>Center Contact</b>	Gold plated beryllium copper		
<b>Housing</b>	Sandblasting natural color conductive oxide		
<b>Dimensions</b>	58×44×15mm	<b>Net Weight</b>	-



Microwave and Millimeter wave products  
supplier

RFTOP® Technology Co., Ltd.  
[www.rftop.com](http://www.rftop.com) [service@rftop.com](mailto:service@rftop.com) 86-755-88840350