




N Directional Coaxial Coupler, RDC1F6NSH-30 1-6GHz, Coupling 30dB, 200W

Dimensions(mm) Tolerance $\pm 1\%$

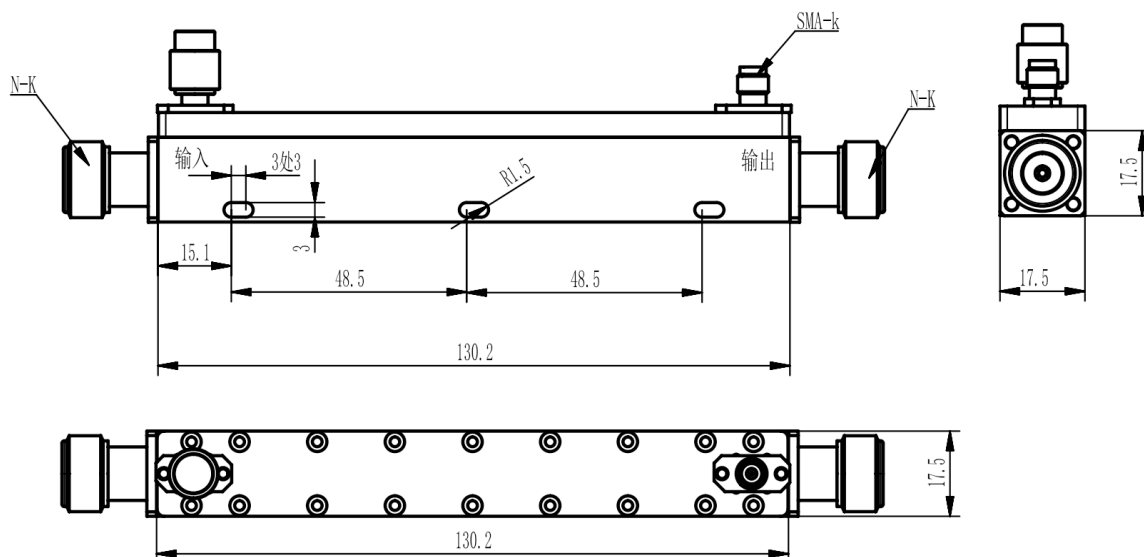

Electrical & Environmental

Frequency Range	1-6GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.5 Max		
Insertion Loss	00.1dB Max		
Nominal Coupling	30 $\pm$ 1.0dB		
Directivity	12dB Min		
Input Avg Power	200 Watts Max @25°C		

Mechanical & Product Information

Product Number	RDC1F6NSH-30, U-Grade	Product Type	Coaxial Coupler
Connector	N Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	130.2 $\times$ 17.5 $\times$ 17.5mm	Net Weight	-