N Directional Coupler, RDC2F6N-5
2-6GHz, Coupling 5dB

Dimensions(mm) Tolerance±1%

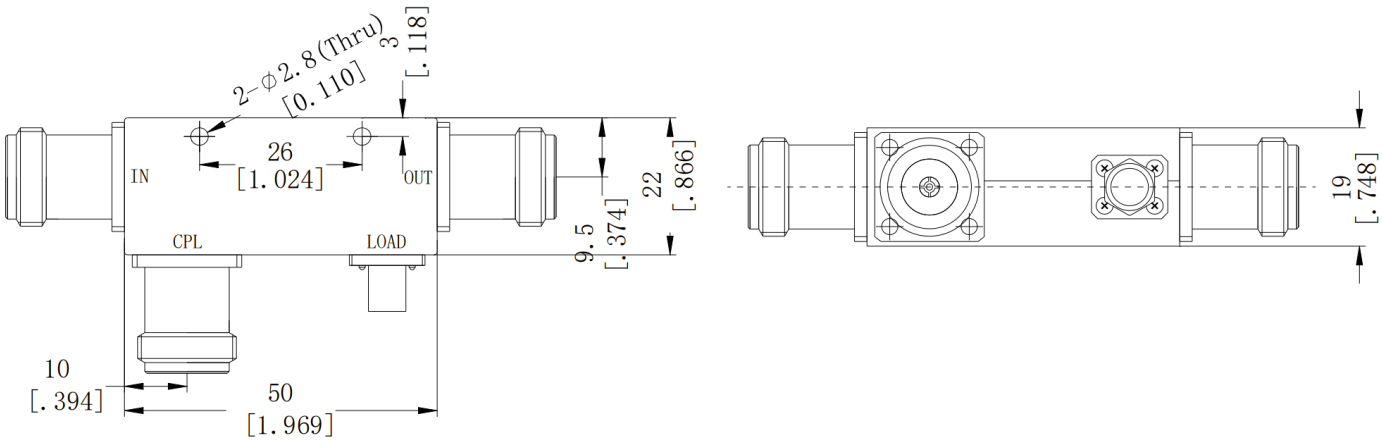

Electrical & Environmental

Frequency Range	2-6GHz	**Impedance**	50 Ohm
VSWR Primary	1.5 Max		
VSWR Secondary	Max		
Insertion Loss	2.4dB Max		
Directivity	15dB Min		
Frequency Sensitivity	±1.0dB		
Nominal Coupling	5±1.0dB		
Operating Temp	-40°C~+70°C		

Mechanical & Product Information

Product Number	RDC2F6N-5	**Product Type**	Directional Coupler
Connector	N Female	**Connector Body**	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	50×22×19mm	**Net Weight**	About 110.0g