


SMA 180 Degree Bridge, RDCB107F202S-10
1700-2200MHz, 30W

Dimensions(mm) Tolerance±1%

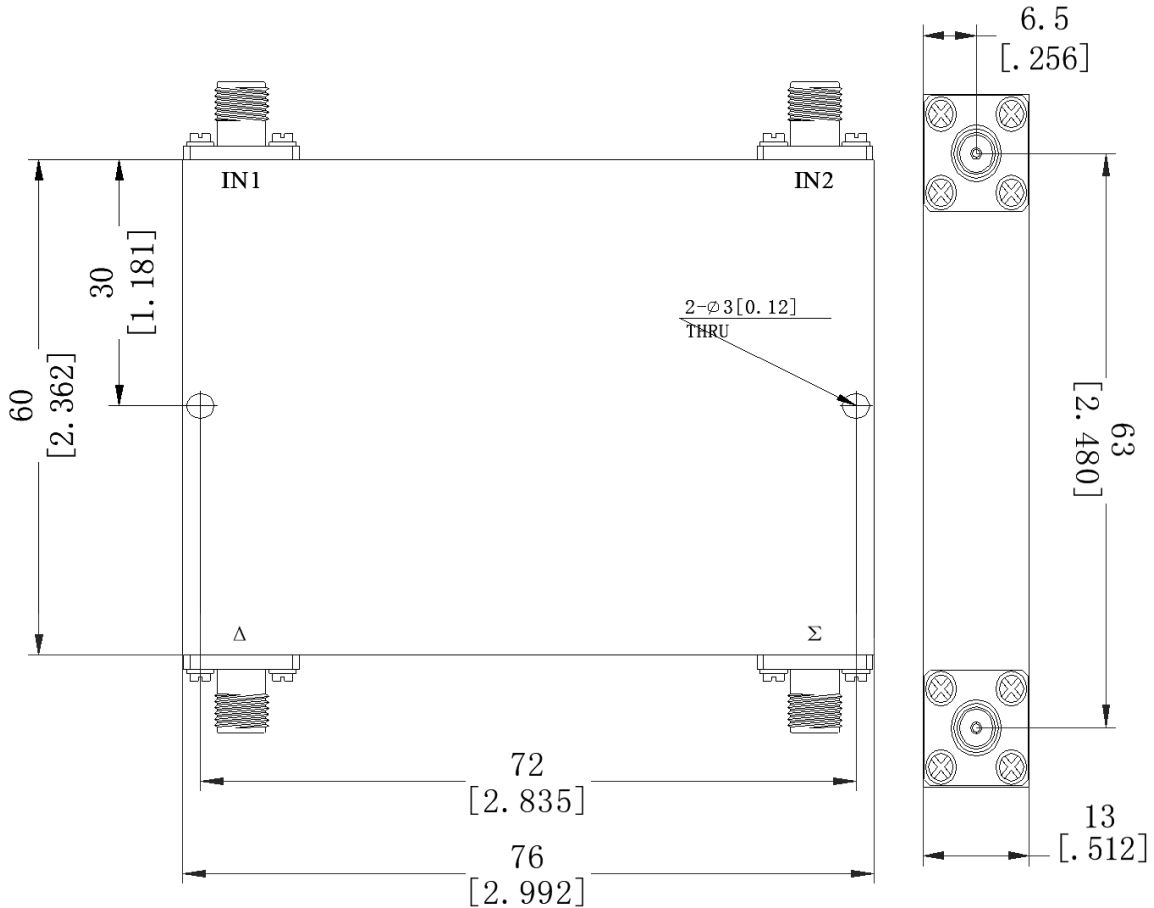

Electrical & Environmental

Frequency Range	1700-2200MHz	Impedance	50 Ohm
VSWR Primary	1.35 Max		
VSWR Secondary	1.35 Max		
Insertion Loss	0.6dB Max		
Directivity	20dB Min		
Frequency Sensitivity	±0.5dB		
Phase Balance	±10°		
Input Avg Power	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C)		
Operating Temp	-45°C~+85°C		

Mechanical & Product Information

Product Number	RDCB107F202S-10	Product Type	180 Degree Bridge
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Light blue paint		
Dimensions	72×60×13mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350