


## 2.92mm(K,SK) 180° 3dB Hybrid Coupler, RDCB26F28K 26-28GHz, 30W

### Dimensions(mm) Tolerance±1%

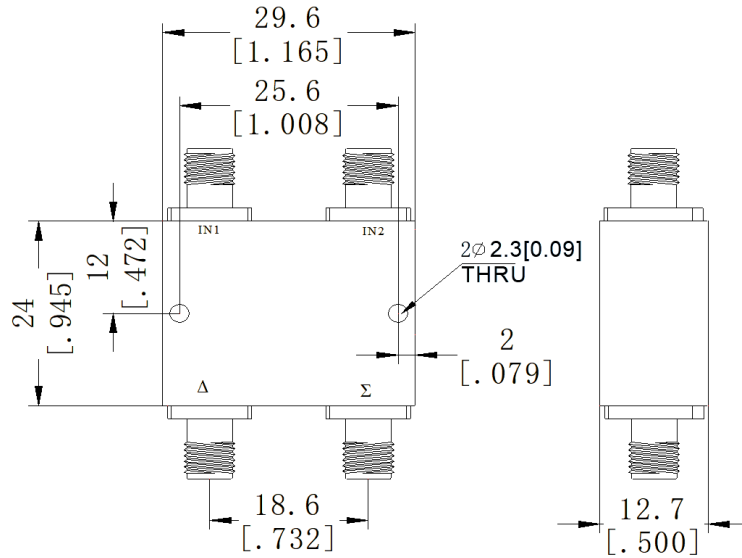

### Electrical & Environmental

Frequency Range	26-28GHz	Impedance	50 Ohm
VSWR Primary	1.6 Max		
VSWR Secondary	1.6 Max		
Insertion Loss	2dB Max		
Phase Difference	180°		
Isolation	16dB min		
Amplitude Balance	±1.0dB		
Phase Balance	±8°		
Input Avg Power	30 Watts Max @25°C		
Operating Temp	-45°C~+85°C		

### Mechanical & Product Information

Product Number	RDCB26F28K	Product Type	3dB Hybrid Coupler
Connector	2.92mm(K,SK) Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	29.6×24×12.7mm	Net Weight	-