


SMA 180 Degree Bridge, **RDCB4F10S-10**
4-10GHz, 30W

Dimensions(mm) Tolerance $\pm 1\%$

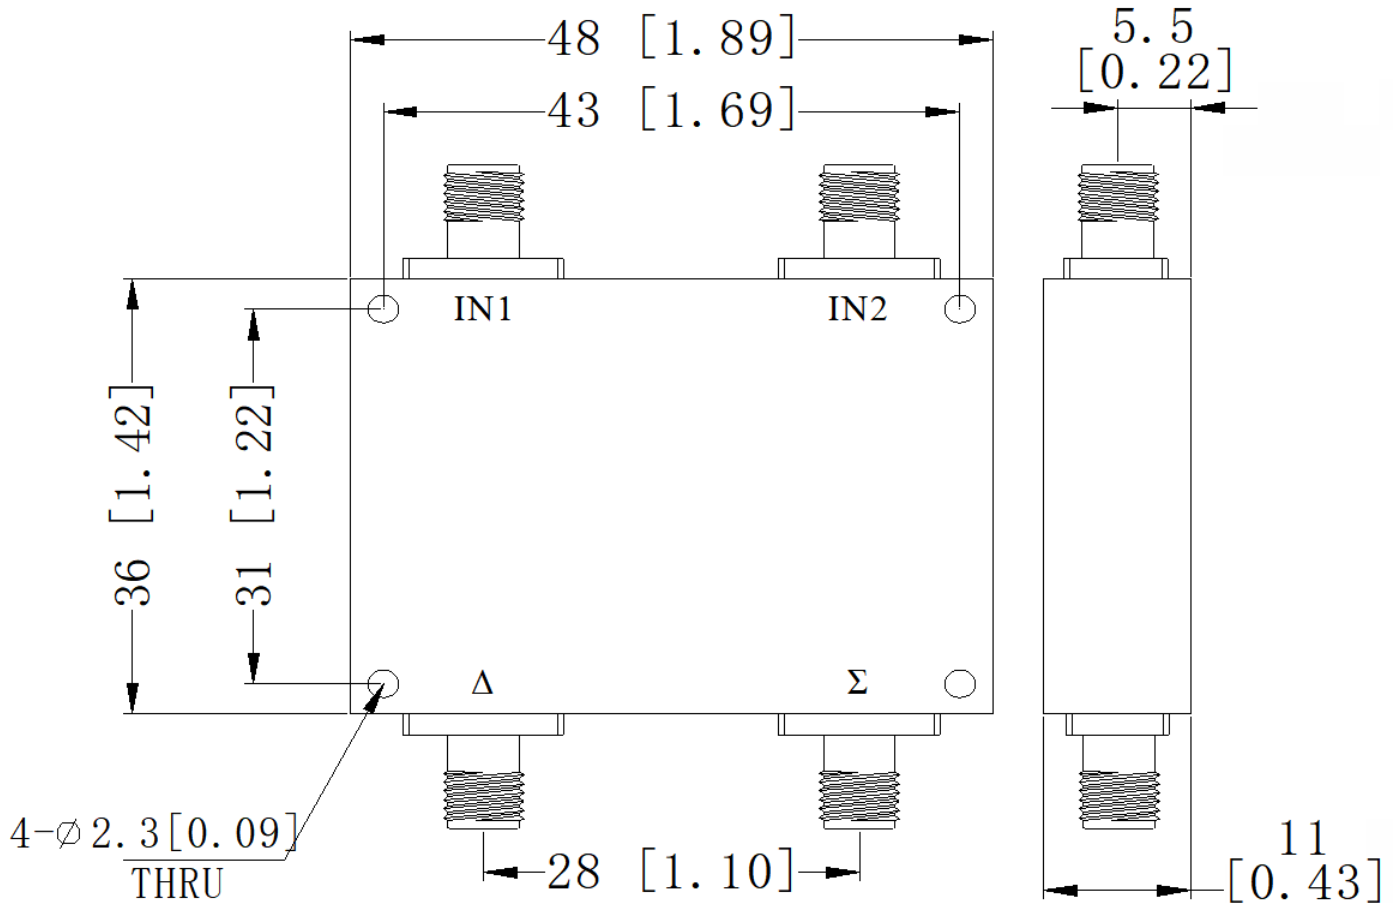

Electrical & Environmental

Frequency Range	4-10GHz	Impedance	50 Ohm
VSWR Primary	1.5 Max		
VSWR Secondary	1.5 Max		
Insertion Loss	1.5dB Max		
Frequency Sensitivity	± 0.8 dB		
Phase Balance	$\pm 10^\circ$		
Input Avg Power	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C)		
Operating Temp	-45°C~+85°C		

Mechanical & Product Information

Product Number	RDCB4F10S-10	Product Type	180 Degree Bridge
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Light blue paint		
Dimensions	48×36×11mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350