


N 90 Degree Bridge, RDCBA024F038N-5
240-380MHz, 100W

Dimensions(mm) Tolerance $\pm 1\%$

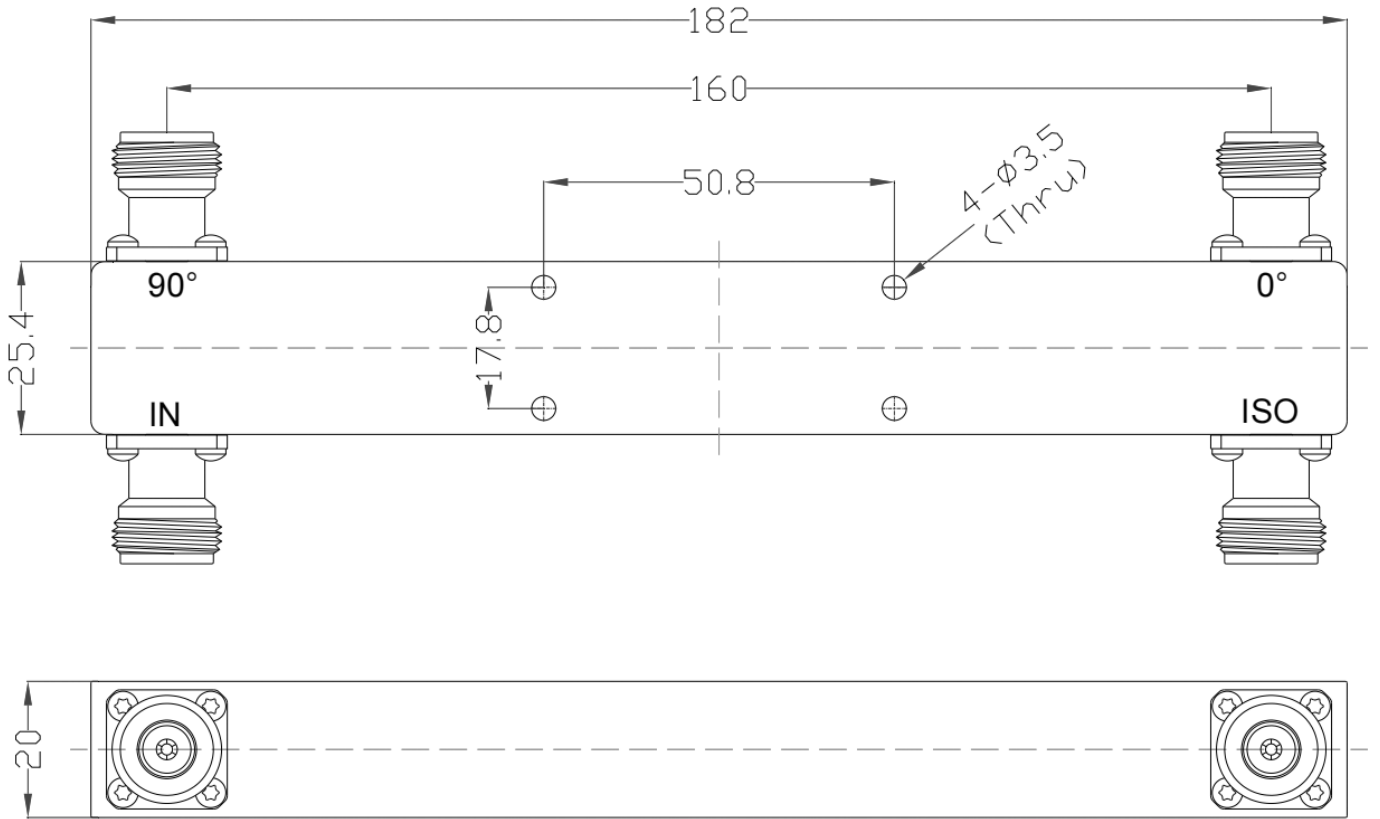

Electrical & Environmental

Frequency Range	240-380MHz	Impedance	50 Ohm
VSWR Primary	1.25 Max		
VSWR Secondary	Max		
Insertion Loss	0.5dB Max		
Phase Balance	$\pm 5^\circ$		
Input Avg Power	100 Watts max @25°C (Derate linearly to 10 Watt at 100°C)		
Operating Temp	-55°C~+85°C		

Mechanical & Product Information

Product Number	RDCBA024F038N-5	Product Type	90 Degree Bridge
Connector	N Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Light blue paint		
Dimensions	182 \times 25.4 \times 20mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350