


SMA 90 Degree Bridge, RDCBA2F6S-4
2-6GHz, 50W

Dimensions(mm) Tolerance±1%

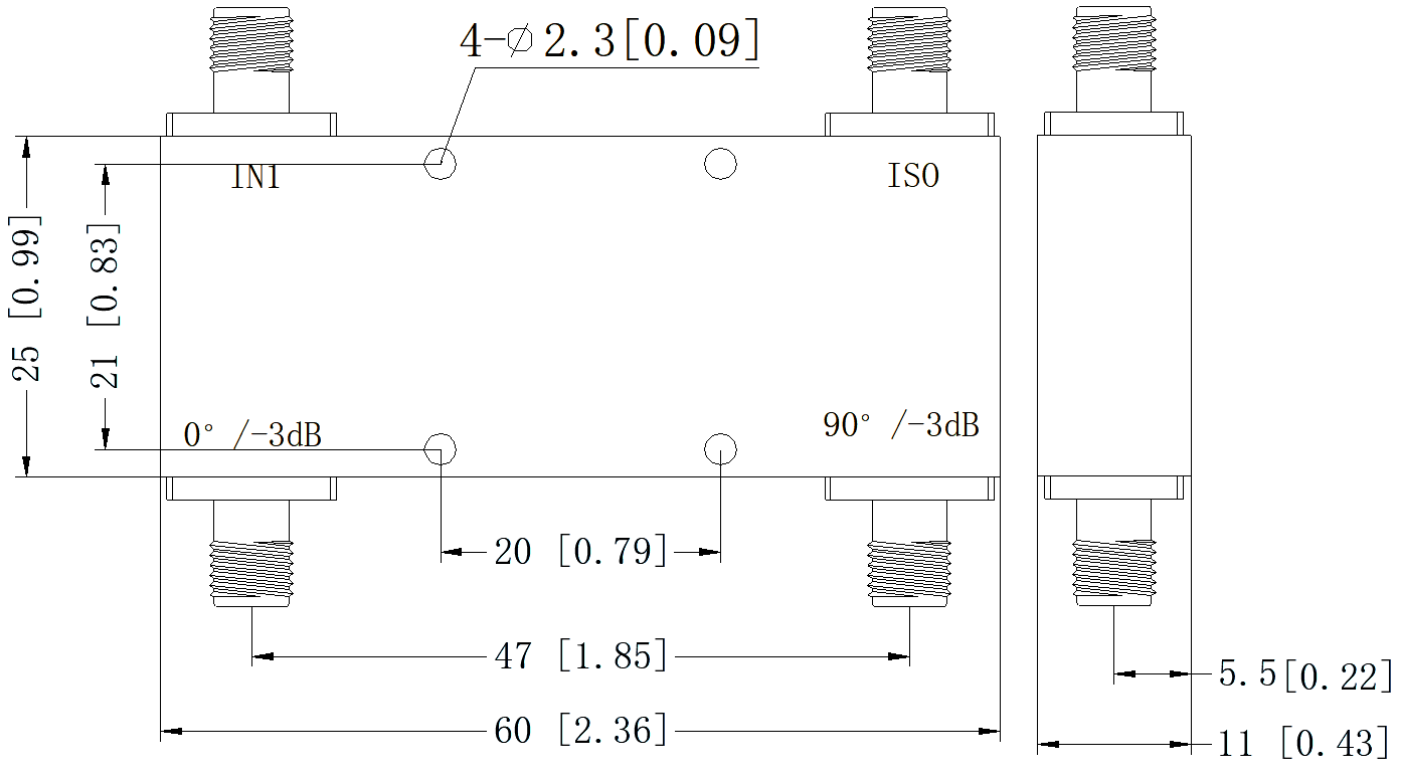

Electrical & Environmental

Frequency Range	2-6GHz	Impedance	50 Ohm
VSWR Primary	1.35 Max		
VSWR Secondary	Max		
Insertion Loss	1.2dB Max		
Phase Balance	±4°		
Input Avg Power	50 Watts max @25°C (Derate linearly to 5 Watt at 100°C)		
Operating Temp	-45°C~+85°C		

Mechanical & Product Information

Product Number	RDCBA2F6S-4	Product Type	90 Degree Bridge
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Light blue paint		
Dimensions	60×25×11mm	Net Weight	-