


SMA Dual Directional Coaxial Coupler, RDCDK4FM400SW300-40 4KHz-400MHz, Coupling 40dB, 300W

Dimensions(mm) Tolerance $\pm 1\%$

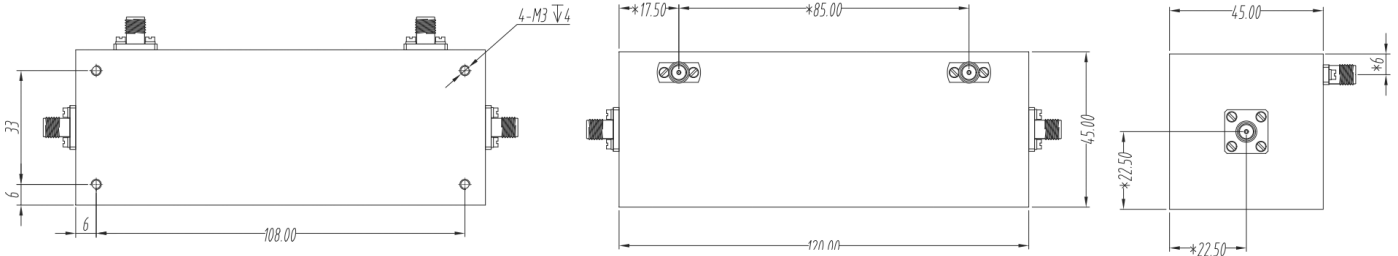

Electrical & Environmental

Frequency Range	4KHz-400MHz	Impedance	50 Ohm
VSWR Primary	1.25 Max		
VSWR Secondary	1.5 Max		
Insertion Loss	0.4dB Max		
Directivity	20dB Min		
Frequency Sensitivity	± 0.5 dB		
Nominal Coupling	40 ± 1.0 dB		
Input Avg Power	300 Watts max @25°C (Derate linearly to 30 Watt at 100°C)		
Operating Temp	-20°C~+60°C		

Mechanical & Product Information

Product Number	RDCDK4FM400SW300-40	Product Type	Coaxial Coupler
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	120(L) \times 45(W) \times 45(H)mm	Net Weight	-