


WR12 Waveguide Directional Coupler, RWDC12-9 60.5-91.9GHz, Coupling 9dB, FUGP740 Circular Flange

Dimensions(mm) Tolerance±1%

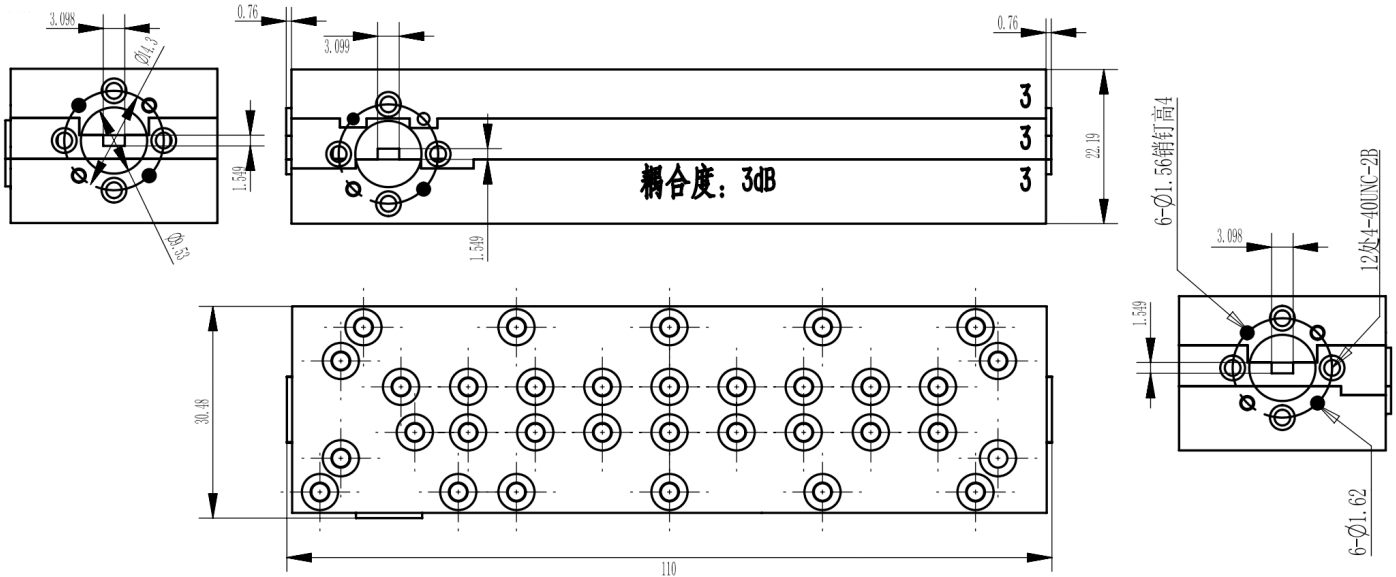

Electrical & Environmental

Frequency Range	60.5-91.9GHz	Impedance	50 Ohm
VSWR Primary	1.15 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	dB Max		
Directivity	25dB Min		
Nominal Coupling	9±1.5dB		

Mechanical & Product Information

Product Number	RWDC12-9, P-Grade	Product Type	Waveguide Directional Coupler
Waveguide	WR12(BJ740), FUGP740 Circular Flange	Waveguide Body	Copper, gold plated
Center Contact	Copper, gold plated		
Housing	Copper, gold plated		
Dimensions	110(L)×30.48(W)×22.19(H)mm	Net Weight	-