


WR137 Waveguide Directional Coupler, RWDC137-3 5.38-8.17GHz, Coupling 3dB, FDP70(UDR) Flange

Dimensions(mm) Tolerance $\pm 1\%$

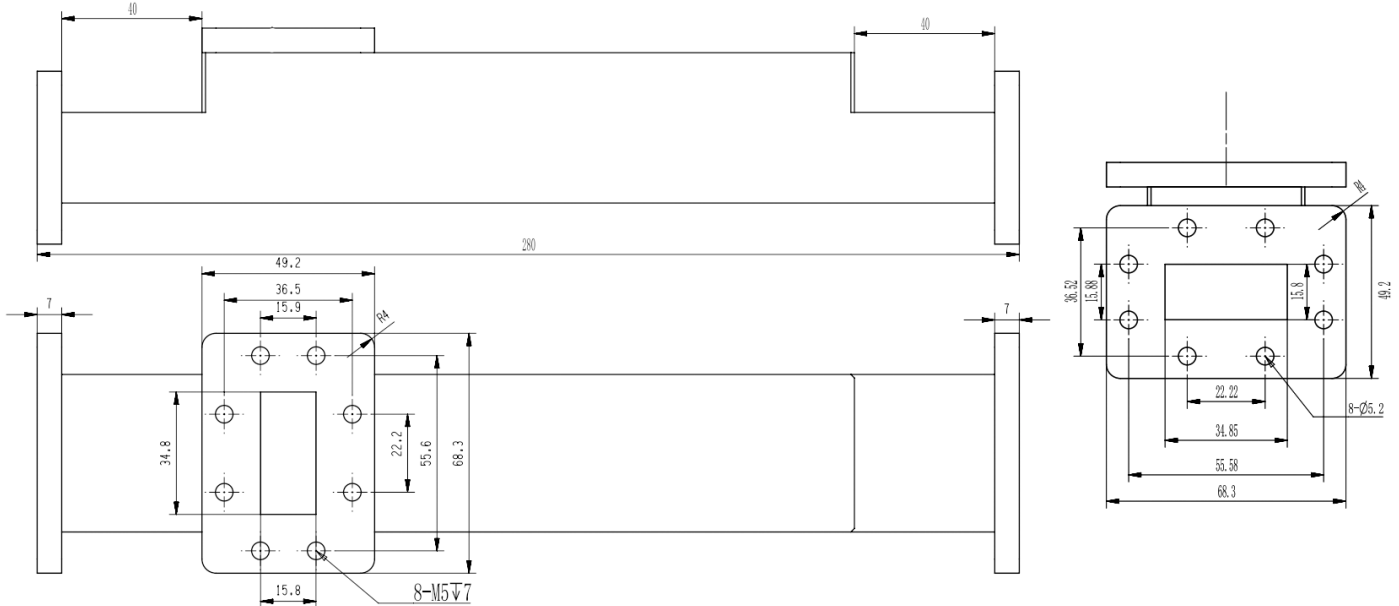

Electrical & Environmental

Frequency Range	5.38-8.17GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.25 Max		
Insertion Loss	dB Max		
Directivity	20dB Min		
Nominal Coupling	3		

Mechanical & Product Information

Product Number	RWDC137-3, P-Grade	Product Type	Waveguide Directional Coupler
Waveguide	WR137(BJ70), FDP70(UDR) Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	280×68.3×49.2mm	Net Weight	-