


## WR15 Waveguide Directional Coupler, RWDC15-10 50-75GHz, Coupling 10dB, FUGP620 Circular Flange

Dimensions(mm) Tolerance $\pm 1\%$

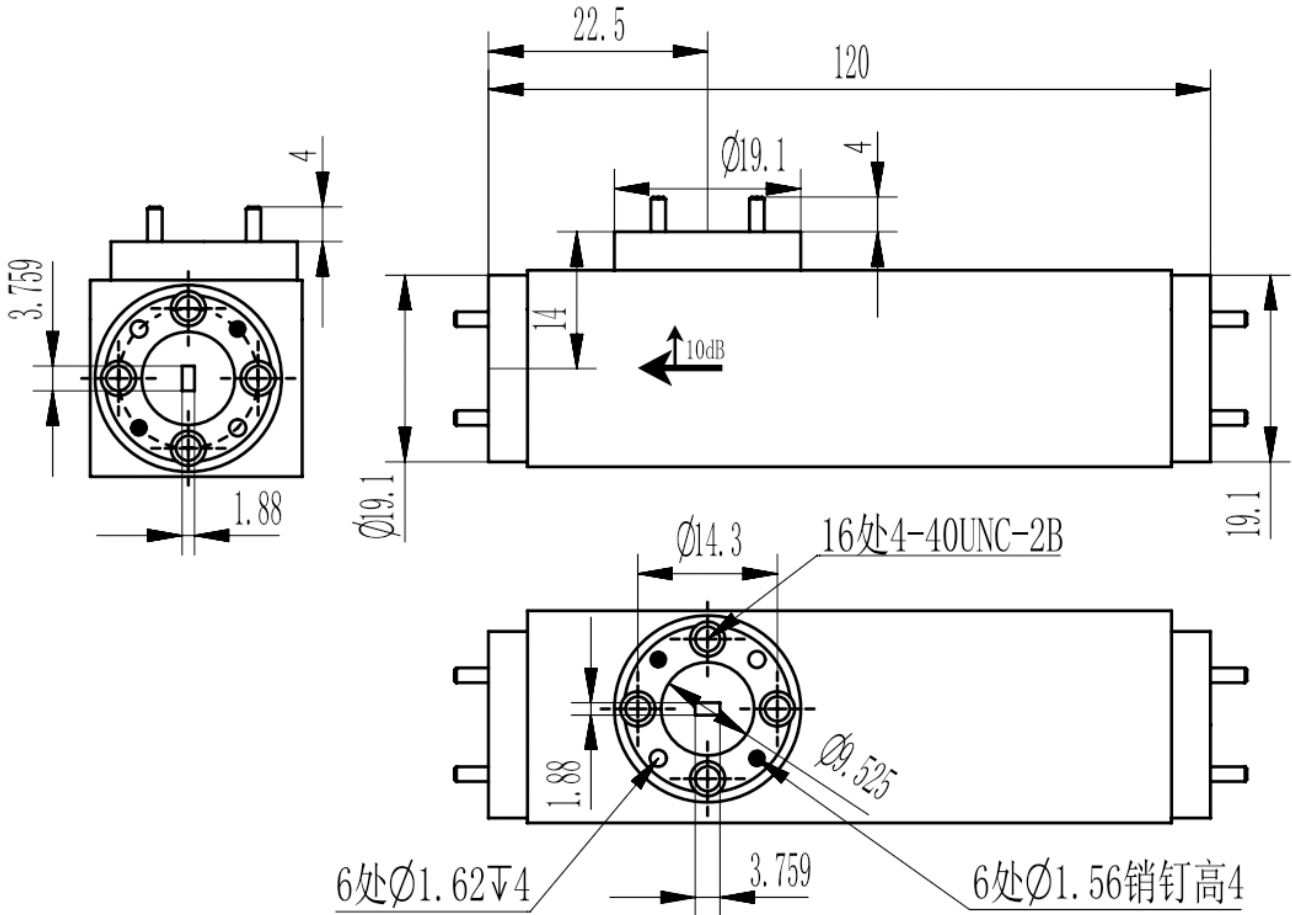

### Electrical & Environmental

Frequency Range	50-75GHz	Impedance	50 Ohm
VSWR Primary	1.2 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	dB Max		
Directivity	40dB Min		
Nominal Coupling	10 $\pm$ 1.5dB		

### Mechanical & Product Information

Product Number	RWDC15-10, P-Grade	Product Type	Waveguide Directional Coupler
Waveguide	WR15(BJ620), FUGP620 Circular Flange	Waveguide Body	Copper, gold plated
Center Contact	Copper, gold plated		
Housing	Copper, gold plated		
Dimensions	120(L) $\times$ 19.1( $\phi$ )mm	Net Weight	-



Microwave and Millimeter wave products  
supplier

RFTOP® Technology Co., Ltd.  
[www.rftop.com](http://www.rftop.com) [service@rftop.com](mailto:service@rftop.com) 86-755-88840350