


## WR5 Waveguide Directional Coupler, RWDC5-6 145-220GHz, Coupling 6dB, FUGP1800 Circular Flange

### Dimensions(mm) Tolerance±1%

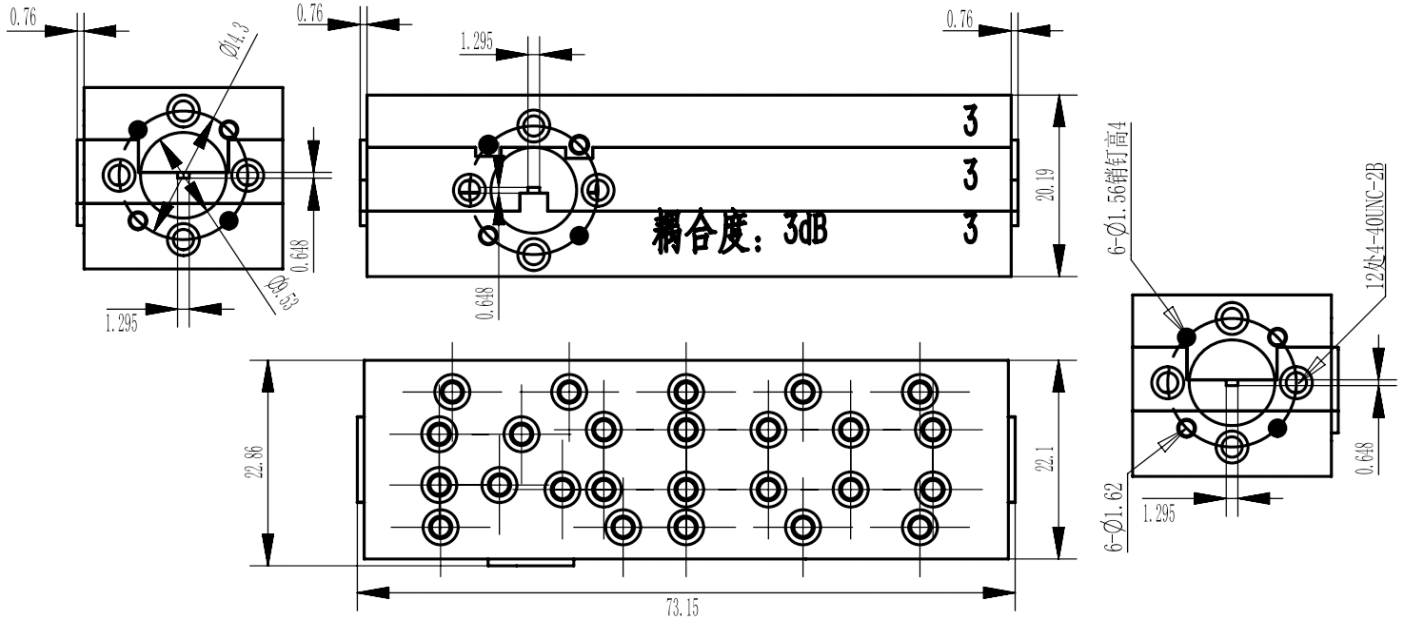

### Electrical & Environmental

Frequency Range	145-220GHz	Impedance	50 Ohm
VSWR Primary	1.15 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	dB Max		
Directivity	25dB Min		
Nominal Coupling	6±2dB		

### Mechanical & Product Information

Product Number	RWDC5-6, P-Grade	Product Type	Waveguide Directional Coupler
Waveguide	WR5(BJ1800), FUGP1800 Circular Flange	Waveguide Body	Copper, gold plated
Center Contact	Copper, gold plated		
Housing	Copper, gold plated		
Dimensions	73.15(L)×22.86(W)×20.19(H)mm	Net Weight	-