


## WR62 Waveguide Directional Coupler, RWDC62-40 12.4-18GHz, Coupling 40dB, FBP140(UBR) Flange

Dimensions(mm) Tolerance $\pm 1\%$

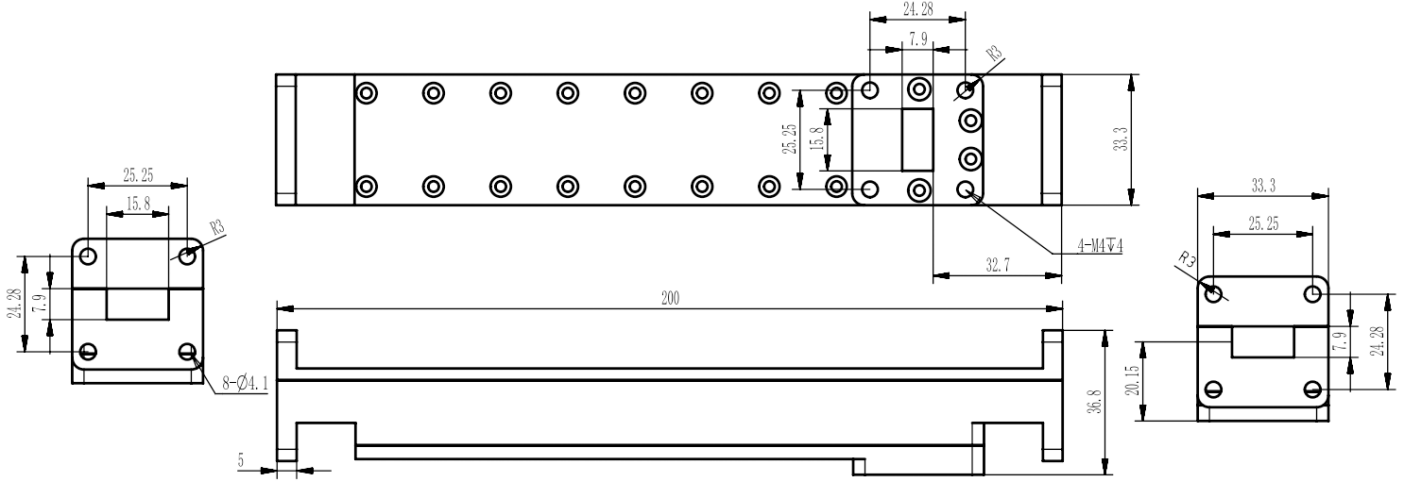

### Electrical & Environmental

Frequency Range	12.4-18GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.25 Max		
Insertion Loss	dB Max		
Directivity	30dB Min		
Nominal Coupling	40 $\pm$ 0.7dB		

### Mechanical & Product Information

Product Number	RWDC62-40, P-Grade	Product Type	Waveguide Directional Coupler
Waveguide	WR62(BJ140), FBP140(UBR) Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	200 $\times$ 33.3 $\times$ 33.3mm	Net Weight	-