




WR62 Waveguide Directional Coupler, SMA Female Coupled Port, RWDC62S-30

11.9-18GHz, Coupling 30dB, FBP140(UBR) Flange

Dimensions(mm) Tolerance $\pm 1\%$

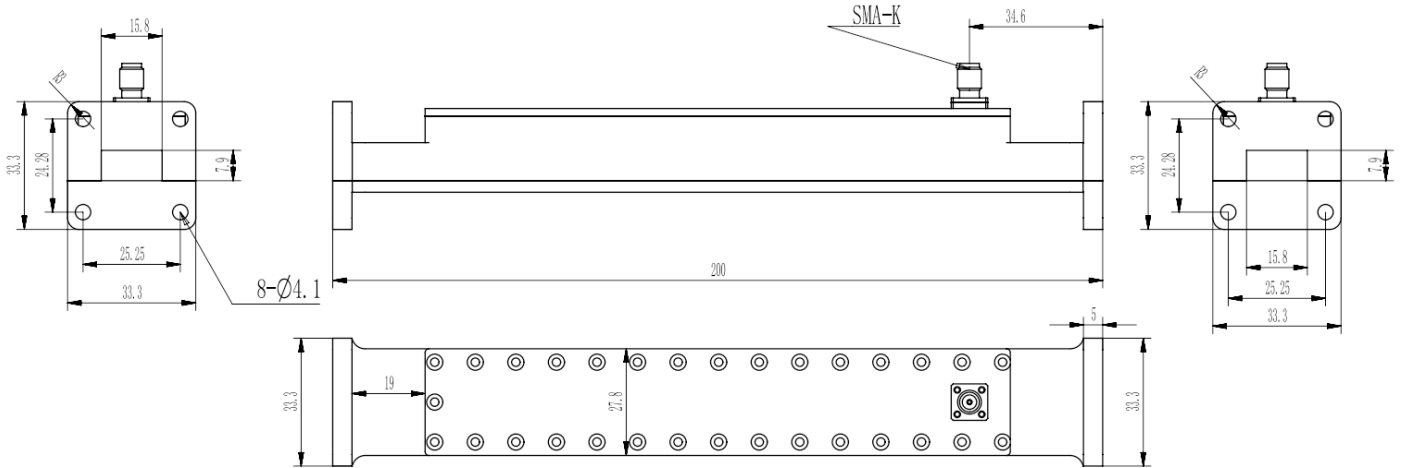

Electrical & Environmental

Frequency Range	11.9-18GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	dB Max		
Directivity	25dB Min		
Nominal Coupling	30 \pm 1.5dB		


Mechanical & Product Information

Product Number	RWDC62S-30, P-Grade	Product Type	Waveguide Directional Coupler
Waveguide	WR62(BJ140), FBP140(UBR) Flange	Waveguide Body	Aluminum, grey painted
Coupled Port	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	200(L) \times 33.3(W) \times 33.3(H)mm	Net Weight	-



WR62 Waveguide Directional Coupler, RWDC62S-30 11.9-18GHz, Coupling 30dB, FBP140(UBR) Flange

Typical Test Data

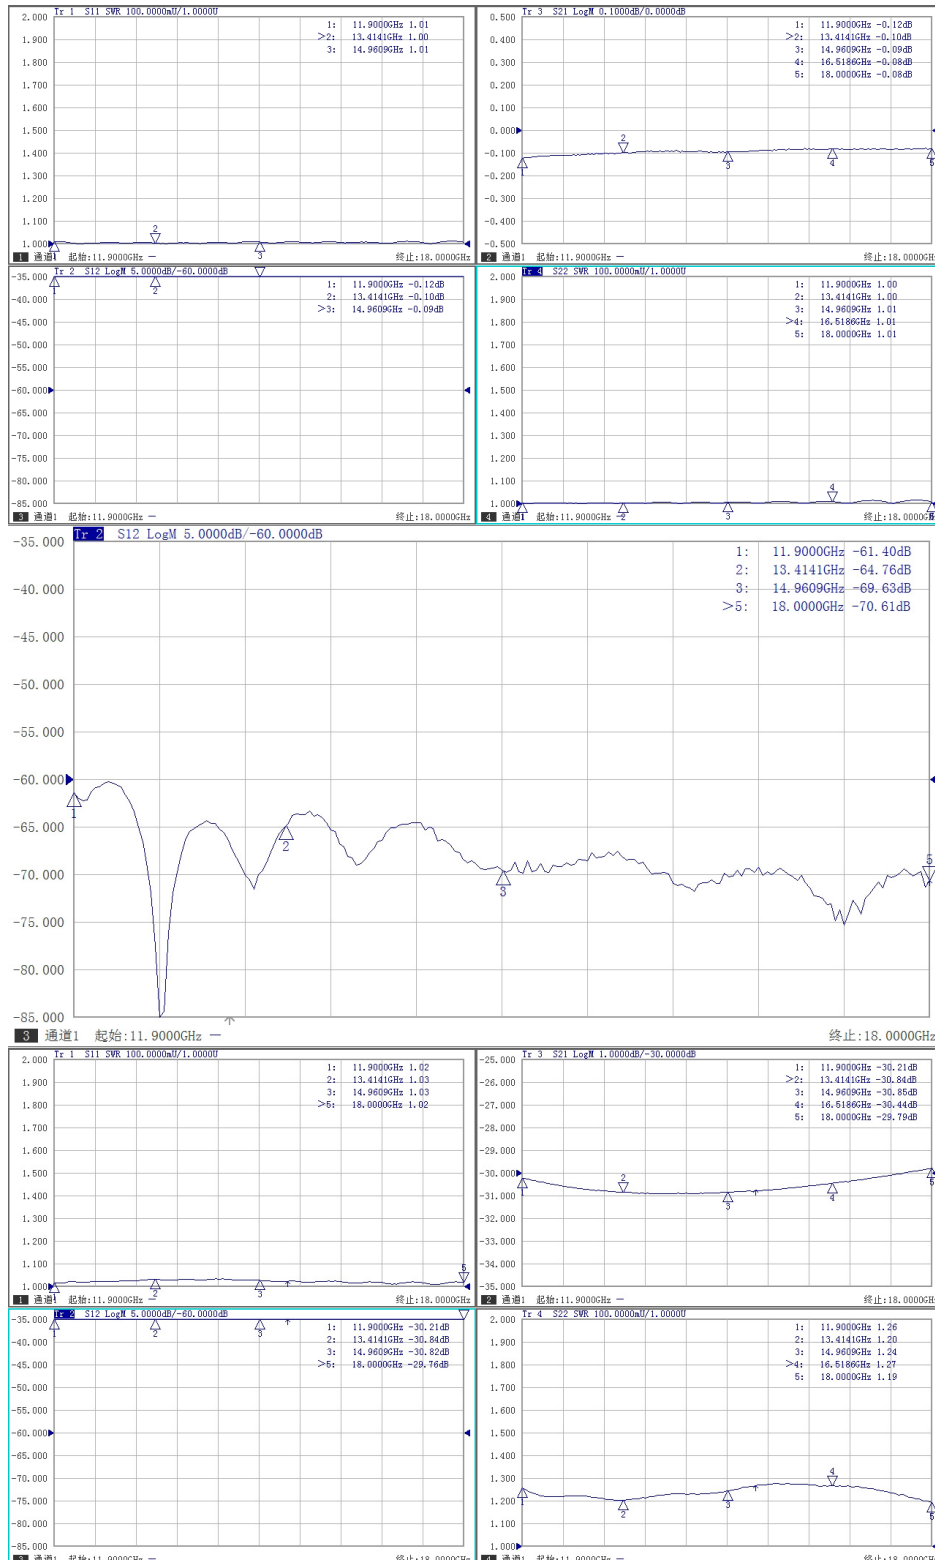



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350