


WR75 Waveguide Directional Coupler, N Female Coupled Port, RWDC75N-30

9.84-15GHz, Coupling 30dB, FBP120(UBR) Flange

Dimensions(mm) Tolerance $\pm 1\%$

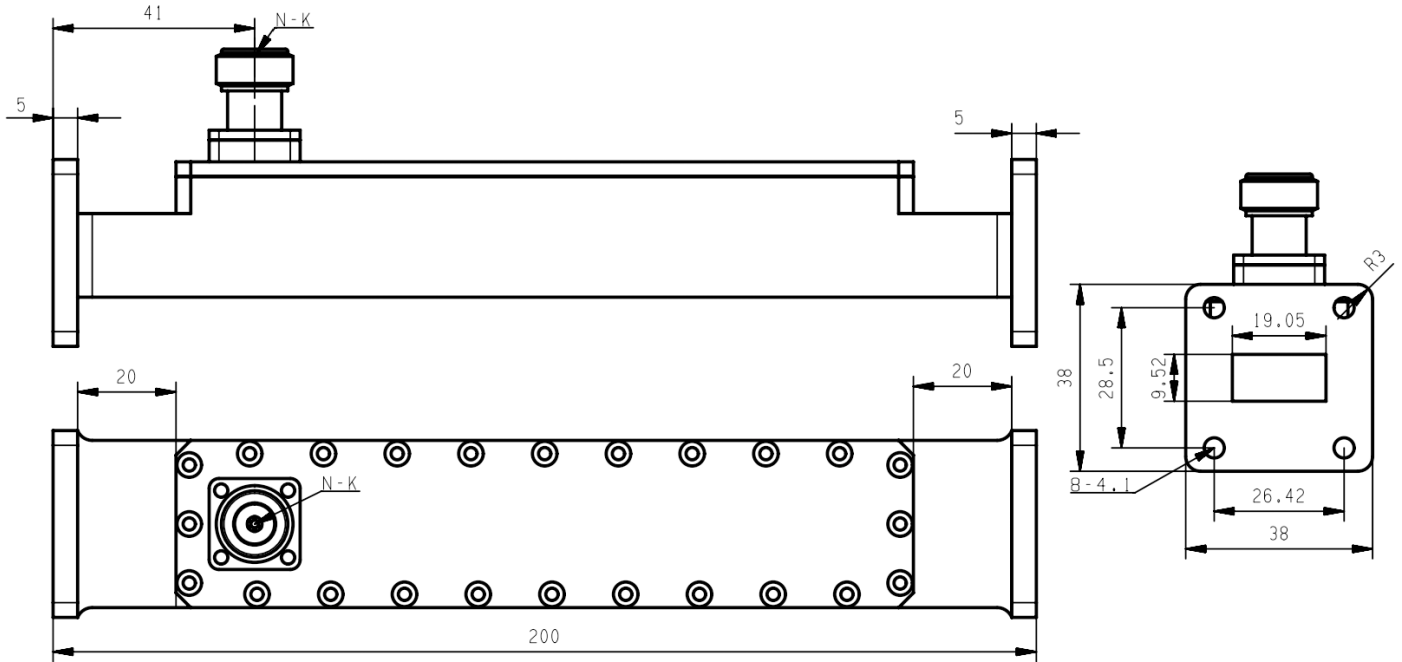

Electrical & Environmental

Frequency Range	9.84-15GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.25 Max		
Insertion Loss	dB Max		
Directivity	30dB Min		
Nominal Coupling	30 \pm 1.0dB		

Mechanical & Product Information

Product Number	RWDC75N-30, P-Grade	Product Type	Waveguide Directional Coupler
Waveguide	WR75(BJ120), FBP120(UBR) Flange	Waveguide Body	Aluminum, grey painted
Coupled Port	N Female	Connector Body	Passivated stainless steel
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	200 \times 38 \times 38mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350